National Library of Canada
Bibliothèque nationale du Canada

Canadian Theses Service
Services des thèses canadiennes

Ottawa, Canada
K1A 0N4

CANADIAN THESES

THÈSES CANADIENNES

NOTICE

The quality of this microfiche is heavily dependent upon the quality of the original thesis submitted for microfilming. Every effort has been made to ensure the highest quality of reproduction possible.

If pages are missing, contact the university which granted the degree.

Some pages may have indistinct print especially if the original pages were typed with a poor typewriter ribbon or if the university sent us an inferior photocopy.

Previously copyrighted materials (journal articles, published tests, etc.) are not filmed.

Reproduction in full or in part of this film is governed by the Canadian Copyright Act, R.S.C. 1970, c. C-30. Please read the authorization forms which accompany this thesis.

AVIS

La qualité de cette microfiche dépend grandement de la qualité de la thèse soumise au microfilmage. Nous avons tout fait pour assurer une qualité supérieure de reproduction.

S'il manque des pages, veuillez communiquer avec l'université qui a conféré le grade.

La qualité d'impression de certaines pages peut laisser à désirer, surtout si les pages originales ont été dactylographiées à l'aide d'un ruban usé ou si l'université nous a fait parvenir une photocopie de qualité inférieure.

Les documents qui font déjà l'objet d'un droit d'auteur (articles de revue, examens publiés, etc.) ne sont pas microfilmés.

La reproduction, même partielle, de ce microfilm est soumise à la Loi canadienne sur le droit d'auteur, SRC 1970, c. C-30. Veuillez prendre connaissance des formules d'autorisation qui accompagnent cette thèse.

THIS DISSERTATION
HAS BEEN MICROFILMED
EXACTLY AS RECEIVED

LA THÈSE A ÉTÉ
MICROFILMÉE TELLE QUE
NOUS L'AVONS REÇUE

Canada

NL 339 (r. 86/01)

National Library of Canada / Bibliothèque nationale du Canada

62

Ottawa, Canada
K1A 0N4

TC –

ISBN 0-315-23260-9

CANADIAN THESES ON MICROFICHE SERVICE – SERVICE DES THÈSES CANADIENNES SUR MICROFICHE

PERMISION TO MICROFILM – AUTORISATION DE MICROFILMER

• Please print or type – Écrire en lettres moulées ou dactylographier

AUTHOR – AUTEUR

Full Name of Author – Nom complet de l'auteur

MEENAKSHINATHAN PARAMESWARAN

Date of Birth – Date de naissance	Canadian Citizen – Citoyen canadien
02/02/1959	☐ Yes Oui ☑ No Non
Country of Birth – Lieu de naissance	**Permanent Address – Residence fixe**
INDIA.	18, BHARATHI ROAD, RAMNAGAR, COIMBATORE, INDIA 641009

THESIS – THÈSE

Title of Thesis – Titre de la thèse

DATA ACQUISITION SYSTEM FOR CO_2, LINESHAPE AND LINEWIDTH ANALYSIS

Degree for which thesis was presented / Grade pour lequel cette thèse fut présentée	Year this degree conferred / Année d'obtention de ce grade
M.Sc	1985
University – Université	**Name of Supervisor – Nom du directeur de thèse**
U. of. A	DR. A.M. ROBINSON

AUTHORIZATION – AUTORISATION

Permission is hereby granted to the NATIONAL LIBRARY OF CANADA to **microfilm** this thesis and to **lend** or **sell copies of the film.**

The author reserves other publication rights, and neither the thesis nor extensive extracts from it may be printed or otherwise reproduced without the author's written permission.

L'autorisation est, par la présente, accordée à la BIBLIOTHÈQUE NATIONALE DU CANADA de **microfilmer** cette thèse et de **prêter** ou de **vendre des exemplaires du film.**

L'auteur se réserve les autres droits de publication; ni la thèse ni de longs extraits de celle-ci ne doivent être imprimés ou autrement reproduits sans l'autorisation écrite de l'auteur.

ATTACH FORM TO THESIS – VEUILLEZ JOINDRE CE FORMULAIRE À LA THÈSE

Signature	Date
Mparameswaran	03/OCT/85

NL-91 (r. 84/03)

Canada

THE UNIVERSITY OF ALBERTA

DATA ACQUISITION SYSTEM FOR CO_2 LINESHAPE AND LINEWIDTH ANALYSIS

by

(C) MEENAKSHINATHAN PARAMESWARAN

A THESIS

SUBMITTED TO THE FACULTY OF GRADUATE STUDIES AND RESEARCH

IN PARTIAL FULFILMENT OF THE REQUIREMENTS FOR THE DEGREE

OF MASTER OF SCIENCE

DEPARTMENT OF ELECTRICAL ENGINEERING

EDMONTON, ALBERTA

FALL 1985

THE UNIVERSITY OF ALBERTA

RELEASE FORM

NAME OF AUTHOR MEENAKSHINATHAN PARAMESWARAN

TITLE OF THESIS DATA ACQUISITION SYSTEM FOR CO_2 LINESHAPE AND LINEWIDTH ANALYSIS

DEGREE FOR WHICH THESIS WAS PRESENTED MASTER OF SCIENCE

YEAR THIS DEGREE GRANTED FALL 1985 .

Permission is hereby granted to THE UNIVERSITY OF ALBERTA LIBRARY to reproduce single copies of this thesis and to lend or sell such copies for private, scholarly or scientific research purposes only.

The author reserves other publication rights, and neither the thesis nor extensive extracts from it may be printed or otherwise reproduced without the author's written permission.

(SIGNED) M Parameswaran

PERMANENT ADDRESS:
18, BHARATHI ROAD
RAMNAGAR, COIMBATORE
INDIA - 641 009.

DATED JUN 6 1985

THE UNIVERSITY OF ALBERTA

FACULTY OF GRADUATE STUDIES AND RESEARCH

The undersigned certify that they have read, and recommend to the Faculty of Graduate Studies and Research, for acceptance, a thesis entitled DATA ACQUISITION SYSTEM FOR CO_2 LINESHAPE AND LINEWIDTH ANALYSIS submitted by MEENAKSHINATHAN PARAMESWARAN in partial fulfilment of the requirements for the degree of MASTER OF SCIENCE.

.....

Supervisor

.....

.....

.....

Date 6 JUN 1985

Dedicated

To my Parents

ABSTRACT

The advances in methods and equipment for data acquisition have improved the accuracy in the results obtained from experiments. In the case of carbon dioxide laser linewidth analysis, the line parameters have been measured and computed by an indirect approach of measuring the absorption coefficient at the line center [27].

A better method of analysing the linewidth of the carbon dioxide laser transitions is to directly measure the lineshape and then compute the linewidth. This method poses a problem of manipulating voluminous data for analysis. With the advent of microprocessors, data acquisition systems can be constructed to handle the data.

One such data acquisition system for use in a single pass absorption experiment was proposed and conducted. The single pass absorption experiment uses a tunable diode laser as a radiation source to measure the lineshape and linewidth of carbon dioxide laser transitions as a function of temperature and pressure.

This thesis describes the experiment, construction of the data acquisition system and the analysis of data. The results obtained from this experiment includes the lineshape and linewidth of the P(16) carbon dioxide laser transition as a function of temperature and pressure.

ACKNOWLEDGEMENTS

The author wishes to extend his sincere thanks to

- his supervisor Dr. A.M. Robinson for all the help, encouragement and guidance during the course of this work
- the Department of Electrical Engineering for providing the opportunity and financial assistance
- the graduate chairman Dr. R. P. Lawson for his help and advice
- Mr. Martyn K. Billing for his help in setting up the experiment
- graduate students in the department of mathematics for the interesting discussions on Voigt function
- his friends Aruna B. Ajjikuttira and Mustansir H. Kheraluwala for their constructive suggestions

The author also wishes to express his indebtedness to his parents and family members, and to all his teachers for their invaluable contributions.

Table of Contents

Chapter		Page
1.	INTRODUCTION	1
	1.1 Carbon dioxide lasers	1
	1.2 Linewidth and Broadening	1
	1.3 Broadening mechanisms	3
	1.4 Thesis Objectives	5
	1.4.1 Data Acquisition	6
	1.5 Thesis organization	7
2.	EXPERIMENT	8
	2.1 Organization	8
	2.2 Procedure	9
	2.3 Averaging Technique	10
	2.4 Data Acquisition	12
	2.5 Frequency Calibration	13
3.	DATA ACQUISITION INTERFACE	17
	3.1 Instrumentation Bus	17
	3.1.1 Handshake function	18
	3.1.2 IEEE-488 Bus	18
	3.1.3 RS-232 Link	20
	3.2 Architecture of the DAI	21
	3.2.1 Hardware organization	21
	3.3 Operation	25
4.	ANALYSIS	34
	4.1 Doppler and Lorentz broadening	34
	4.2 Analysis of the Voigt function	36
	4.2.1 Classification of the regions	36

4.2.2 Taylor series expansion method 37

4.2.3 Continued fraction method 40

4.2.4 Four-point and two-point gaussian quadrature 40

4.3 Computation of experimental absorption coefficient 41

4.3.1 Determination of line center 43

4.3.2 Frequency calibration using the etalon 43

4.4 Fitting the Voigt function to the experimental data 44

4.4.1 Initial fitting 44

4.4.2 Fitting using sum of squared errors 46

5. RESULTS AND CONCLUSIONS 52

5.1 Obtained results 52

5.2 Further Research 55

5.3 Conclusions 55

REFERENCES 64

APPENDIX A 68

List of Tables

Table		Page
5.1	Experimentally calculated line parameters and the line parameters obtained from Voigt function fitting for the CO_2 P(16) line	57
5.2	Line parameters obtained from the Voigt function fitting for absorption coefficient values above 10% for the CO_2 P(16) line	58

List of Figures

Figure		Page
1.1	Profile of a transition line	4
1.2	Profile of an absorption line and the relative spectral linewidth of the E.M. source	4
2.1	Experimental set-up	11
2.2	Output pattern produced by the etalon	15
3.1	Handshake operation of IEEE-488 bus	19
3.2	Handshake operation of RS-232 link	19
3.3	Hardware organization of the Data Acquisition Interface	22
3.4	Memory organization	24
3.5	Schematic of clock, step circuit and line buffer	26
3.6	Schematic of decoding and I/O interfacing	27
3.7	Schematic of ROM, RAM and ACIA	28
3.8	Schematic of IEEE-488 peripheral interfacing	29
3.9	Operation Flow Chart of the Data Acquisition Interface	30
3.10	Data Transfer Flow Chart	32
4.1	Computational regions used for different numerical methods	38
4.2	The data obtained from the experiment in graphical form 1.Absorption cell filled with CO_2 2.Absorption cell empty 3.Etalon introduced in the optical path	42
4.3	Absorption coefficient calculated with respect to x. CO_2 P(16)line at 50 Torr and 380K.	45
4.4	Theoretical Voigt function fitted to the experimental data. CO_2 P(16)line at 50 Torr and 380K	47

Figure Page

4.5 Voigt fitting for CO_2 P(16) line at 101 Torr and 418K 48

4.6 Voigt fitting for CO_2 P(16) line at 80 Torr and 418K 49

4.7 Voigt fitting for CO_2 P(16) line at 49 Torr and 418K 50

4.8 Voigt fitting for CO_2 P(16) line at 29 Torr and 418K 51

5.1 Linewidth dependance on pressure at 380K; P(16)line 59

5.2 Linewidth dependance on pressure at 418K; P(16) line 60

5.3 Linewidth dependance on pressure at 449K; P(16) line 61

5.4 Linewidth dependance on pressure at 526K; P(16) line 62

5.5 Linewidth dependance on temperature 63

List of Plates

Plate		Page
2.1	Photograph of the experimental setup	16
2.2	Photograph of the instrument panel	16
3.1	Photograph of the data acquisition interface	33

1. INTRODUCTION

1.1 Carbon dioxide lasers

Carbon dioxide plays an important role as active medium in CO_2 lasers, amplifiers, and attenuators, as well as affecting atmospheric transmission of infrared radiation at 10μm. CO_2 lasers have numerous uses in the field of communications, medical and industrial applications, and fusion studies. The linewidth (bandwidth at half maximum of the lineshape function) of the radiative transition in CO_2 is an essential parameter which determines the laser efficiency, optical amplification, and absorption in the applications mentioned above. The knowledge of the variation of linewidth with temperature and the lineshape in the 0 to 100 Torr pressure range is necessary for more complete understanding of numerous effects in CO_2.

The objective of this research project is the systematic measurement of linewidth as function of temperature and pressure by determining the lineshape and then computing the bandwidth at half maximum. This approach will provide us much more accurate results than the results obtained from [3], [6] and [27].

1.2 Linewidth and Broadening

Laser action in a gas is obtained by subjecting the gas to an electric discharge. The energetic electrons produced by the discharge collide with gas molecules, exciting them

to higher energy levels. These excited molecules then fall to lower energy levels, emitting the excess energy in the form of photons. The spectral analysis of the radiation emitted by spontaneous transitions shows that the radiation is not strictly monochromatic but occupies a finite frequency bandwidth. The function describing the distribution of emitted energy versus frequency is referred to as the lineshape function $g(\nu)$ of the transition. The scale factor is usually chosen so that the function is normalised according to

$$\int_{-\infty}^{+\infty} g(\nu)\,d\nu = 1 \qquad \ldots\ldots(1.1)$$

The bandwidth at half maximum of the lineshape function is called the linewidth of that particular transition. The linewidth is found to be a function of the temperature and pressure. A typical lineshape profile is shown in figure 1.1.

One method of determining $g(\nu)$ is to pass electromagnetic radiation through a sample containing CO_2 molecules and measure the amount of energy absorbed as a function of frequency [1].

From this we can determine the absorption coefficient of the gas using the formula

$$I = I_o e^{-kz} \quad \ldots\ldots\ldots\ldots\ldots\ldots\ldots\ldots\ldots\ldots\ldots\ldots\ldots\ldots (1.2)$$

where

I_o = Intensity of the E.M. source

I = Intensity after absorption

k = Absorption coefficient

z = Length of the absorbing medium

The absorption coefficient is proportional to the lineshape function $g(\nu)$, and the latter can be obtained from the measured absorption coefficient.

For accurate measurement of the lineshape, the spectral width of the electromagnetic source should be narrow compared to the linewidth of the absorber.

1.3 Broadening mechanisms

There are in general five processes that contribute to the broadening of an absorption line of a gas [2]. The five type of broadening are as follows:

1. Natural broadening, due to the finite life time of the excited states.
2. Doppler broadening, due to the motions of the atoms.
3. Lorentz broadening, due to collisions with foreign atoms.
4. Holtzmark broadening, due to the collisions with other absorbing atoms of the same kind.
5. Stark broadening, due to collisions with electrons and

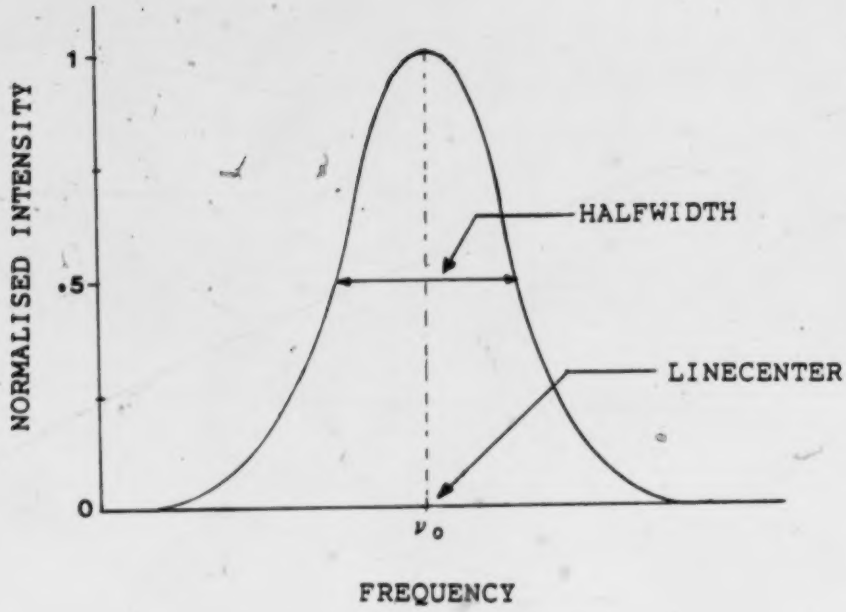

Figure 1.1 Profile of a transition line

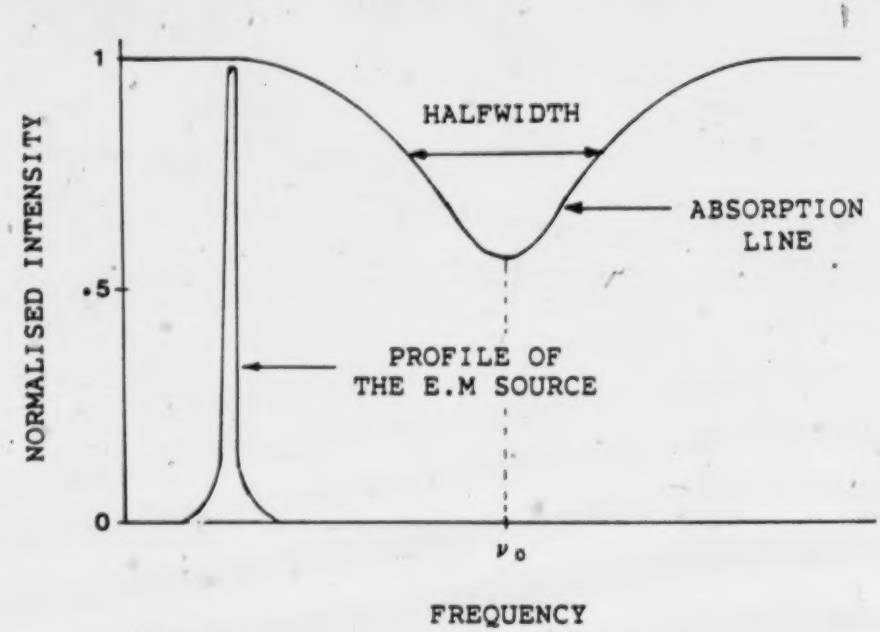

Figure 1.2 Profile of an absorption line and the relative spectral linewidth of the E.M. source

ions.

Both Lorentz and Holtzmark types of broadening are referred to as "pressure broadening" or "collisional broadening".

1.4 Thesis Objectives

Present day CO_2 lasers are operated in a pressure range of 10 Torr to 100 Torr and generally at temperatures between 350-500K. Ref [7] indicates that CO_2 lines exhibit a Voigt profile in the pressure range of 10 to 50 Torr and at 300 K. It is usually assumed that the pressure broadened linewidth

$$L\nu \sim p\, T^{-n} \qquad (1.4.1)$$

where,

p = Pressure

T = Absolute temperature

and n has been assumed or measured to have a value between 0.5 and 1.0 [3], [5], [7], [27], [28], [29].

Although measurements of linewidth have been made at room temperature [3], [7] and 384K [3], a systematic investigation of the lineshape and linewidth behaviour in the pressure range 10-100 Torr and at temperatures above 370K has not been performed before but, was conducted in the work described here. Also this systematic investigation will

determine the the value of n with much higher accuracy.

The objective of the experiment is to determine the absorption coefficient as a function of frequency for a CO_2 transition line. From the measured lineshape, the linewidth is obtained by measuring the bandwidth at half maximum.

The variable frequency source for the absorption experiment is a tunable diode laser. The output frequency of the tunable diode laser is a function of the diode current. A Fabry-Perot etalon is used to calibrate the frequency of the diode laser. The lineshape function of CO_2 tansition lines is assumed to be a Voigt function, and a FORTRAN program is written to fit a theoretical Voigt function to the measured absorption coefficient.

1.4.1 Data Acquisition

Data acquisition forms an essential part of any experimentally oriented research. For efficient management and processing of data, in terms of good accuracy, high speed and handling of voluminous information, a digital processor is essential. Present day digital instruments are provided with a standard instrumentation bus such as IEEE-488, RS-232 and S-100. Acquiring data from these busses for analysis and storage requires a data acquisition interface. To assist the absorption experiment in fast and accurate data acquisition, a microprocessor-based data acquisition interface is constructed and is described in detail in chapter 3.

1.5 Thesis organization

Chapter 2 describes the experimental set-up, the averaging technique for improving signal-to-noise ratio and the calibration of the output frequency of the tunable diode laser. The design, construction and operation of the data acquisition interface is explained in chapter 3. The analysis of the absorption line and fitting the Voigt function to the experimental data is detailed in chapter 4. The results obtained are listed in chapter 5. The functional dependance of the pressure broadened linewidth with pressure and temperature are analysed in detail and the results are also included in chapter 5.

2. EXPERIMENT

2.1 Organization

The experimental arrangement is shown in figure 2.1. It consists of a tunable semiconductor diode laser (TDL), an absorption cell, a monochromator, a detector, an amplifier, and a signal averager. The TDL emits infrared radiation at a wavelength of approximately 10μm, which is the same wavelength region as the CO_2 laser transitions. The laser beam is directed through the absorption cell and monochromator and is finally focused on to the detector by the optical arrangement shown in figure 2.1. The output of the detector is amplified and fed to the signal averager.

The absorption cell is situated inside an oven whose temperature can be controlled. The absorption cell can also be filled with CO_2 gas to the required pressure.

Since the lineshape of the CO_2 transitions are measured in terms of the absorption suffered by the infrared laser beam, the infrared laser source must have a narrow spectral linewidth (see figure 1.2). One source of extremely narrow spectral width is the TDL. The TDL used for the experiment is a PbCdS diode laser manufactured by Laser Analytics [24]. The output of a typical TDL has a spectral width of 54 kHz [25]. In comparison, the doppler linewidth of CO_2 line is 50 MHz at 300K.

The output frequency of the TDL can be easily tuned by adjusting the current flowing through it. The current may

also be modulated by applying an external signal. The output of the TDL is controlled by a Laser Control Module and a Cryogenic Temperature Stabilizer [19]. A periodic modulating ramp signal, of 0.3 volts amplitude and 3 seconds period, is applied to the modulating input of the Laser Control Module [3]. This enables the TDL to emit an infrared laser beam which is repetitively varying in frequency over a range determined by the amplitude of the modulating signal [16].

This periodic sweep of the TDL is used for averaging purposes to improve the signal-to-noise ratio at the final output of the experiment. The photograph of the experimental set-up and the instrument panel are shown in plates 2.1 and 2.2.

2.2 Procedure

The absorption cell is filled with CO_2 gas to the required pressure and the oven is set to the required temperature. The frequency of the TDL is swept over a range which is adjusted to include an absorption line. The output of the detector shows the absorption by the CO_2 transition, from which the absorption coefficient throughout the line is determined.

The optical throughput of the entire experimental set-up is small. Hence, the signal at the detector contains noise so that accurate determination of lineshape is difficult. In order to maximise the precision of the measurements, the output is measured for a number of sweeps

and averaged for subsequent analysis.

For this purpose an EG&G Model 4203 signal averager is used [18]. The mode of averaging and the number of sweeps to be averaged are preset using the controls of the instrument [18]. Averaging will increase the signal-to-noise ratio by reducing the effect of the random noise appearing on the output signal.

2.3 Averaging Technique

As mentioned in section 2.2, the entire optical system has a low throughput. The signal averager gives three options of averaging the signal for the required number of sweeps:

1. Exponential averaging
2. Normalised averaging
3. Summation averaging

The normalised averaging technique is chosen for the experiment, because of its high signal-to-noise improvement ratio (SNIR). SNIR is the amount of additional signal-to-noise ratio obtained by the process of averaging.

The normalised averaging method is as follows:

$$A_k = A_{k-1} + (I_k - A_{k-1})/2^j \quad \text{.....(2.3.1)}$$

where,

A_k = Average after k sweeps

A_{k-1} = Average after k-1 sweeps

I_k = Kth input signal

j = A positive integer, which ranges

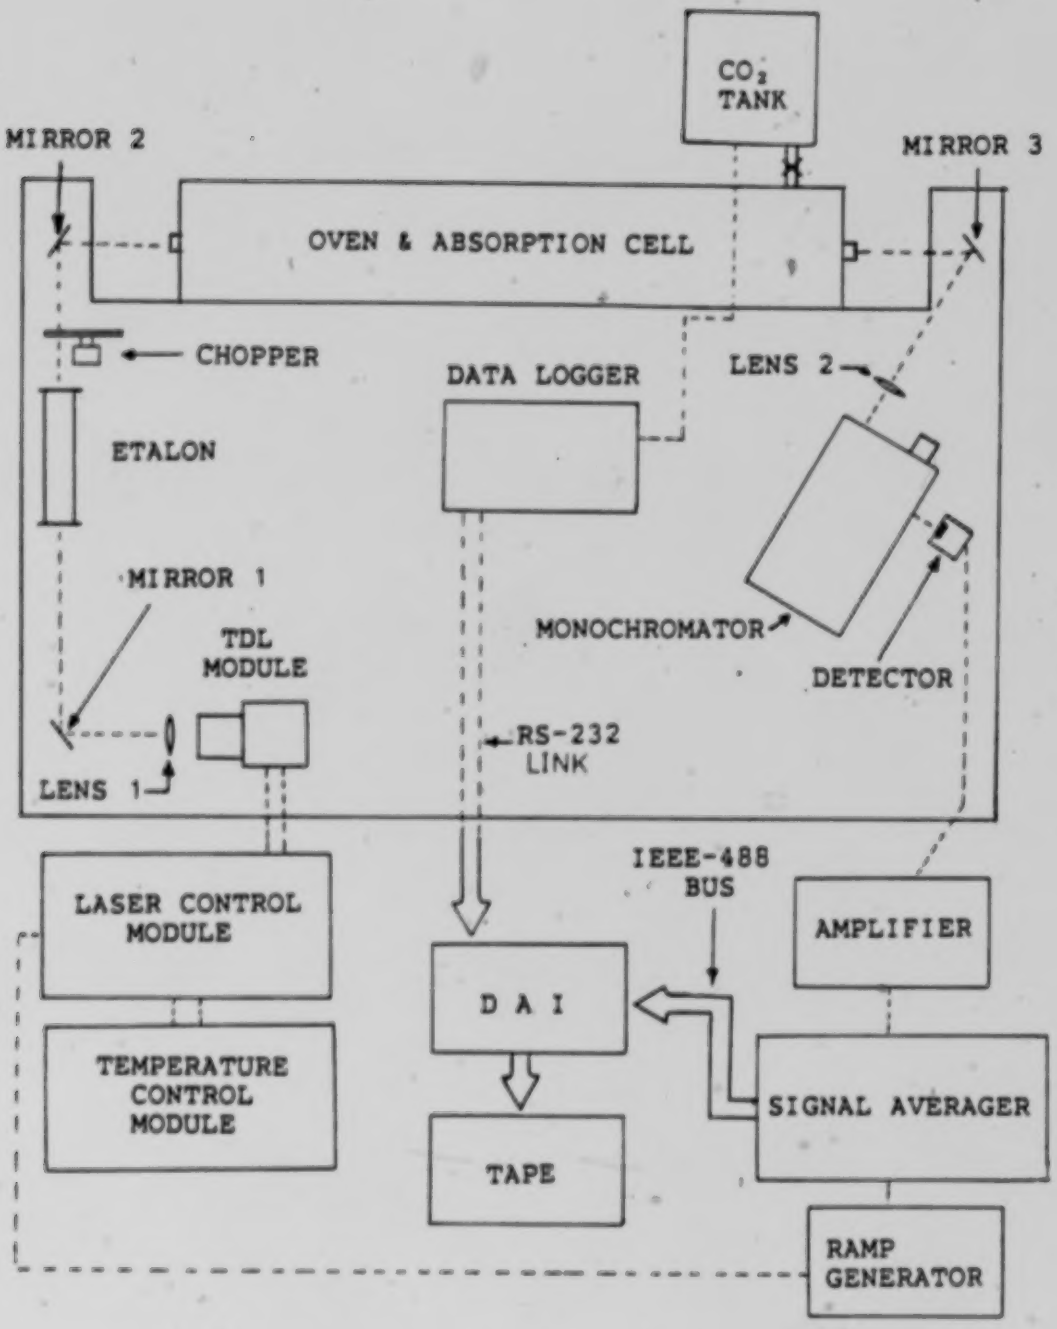

Figure 2.1 Experimental set-up

from 0 - 19

The selection of j is automatically done by the signal averager, and depends on the total number of sweeps selected.

The signal-to-noise improvement ratio (SNIR) for the normalised averaging is given as

$$SNIR = \sqrt{S} \quad \text{.....(2.3.2)}$$

where,

S = Total number of sweeps

2.4 Data Acquisition

After the preset number of sweeps are completed, the data representing the transmission through the absorption cell is stored in the memory of the signal averager. The size of the memory is 1024 locations, with each location containing the data in ASCII format. To retrieve the data for analysis the signal averager gives two options:

1. x - y recorder output. Through this output the data can be transferred to chart-paper.
2. IEEE-488 bus [20]. Using an intelligent computer interface the data can be transferred from memory of the signal averager to any I/O device in the form of ASCII codes.

The latter option is chosen for the experiment for the following reasons:

1. Fast data transfer can be implemented
2. Data from all the 1024 memory locations can be

transferred

In addition, the IEEE-488 bus provides the option of operating the signal averager remotely [8], [18].

The construction of the data acquisition interface for the purpose of data transfer from the signal averager to an I/O device is described in chapter 3.

2.5 Frequency Calibration

The frequency of the radiation output of the TDL is neither calibrated nor listed as a function of the sweeping current through it. From the obtained absorption data, only the line center frequency is known. To obtain a calibration for the sweep range, a Fabry-Perot etalon is introduced in the optical path [4].

The Fabry-Perot etalon is made of two plane parallel plates separated by a distance d. The parallel surfaces are well polished so that the plane surfaces act as partially reflecting and partially transmitting media [1]. When the laser beam passes through the etalon, the reflections of the two surfaces produces interference on the transmitted beam. As the frequency of the laser beam changes it produces an output pattern in the detector as shown in figure 2.2.

The frequency difference $\Delta\nu$ between any two adjacent peaks is given by the formula

$$\Delta\nu = c/(2\ n\ d) \qquad (2.5.1)$$

where,

c = Velocity of light

n = Refractive index of the medium

d = Thickness of the etalon

Since the frequency of the line center is known accurately, we can calculate the frequencies over the entire sweep range. The exact calculations are described in detail in section 4.3.2

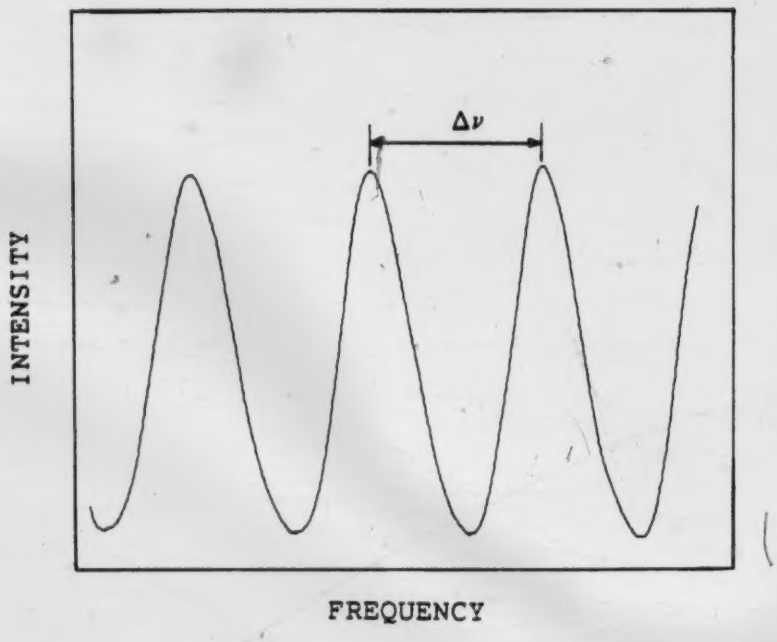

Figure 2.2 Output pattern produced by the etalon

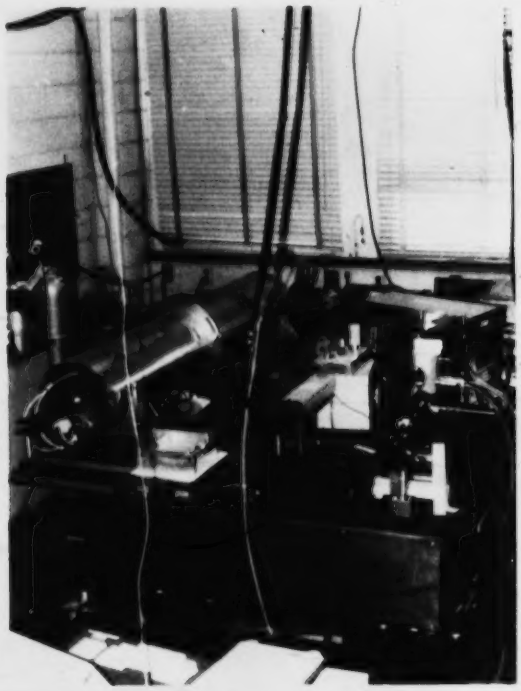

Plate 2.1 Photograph of the experimental set-up

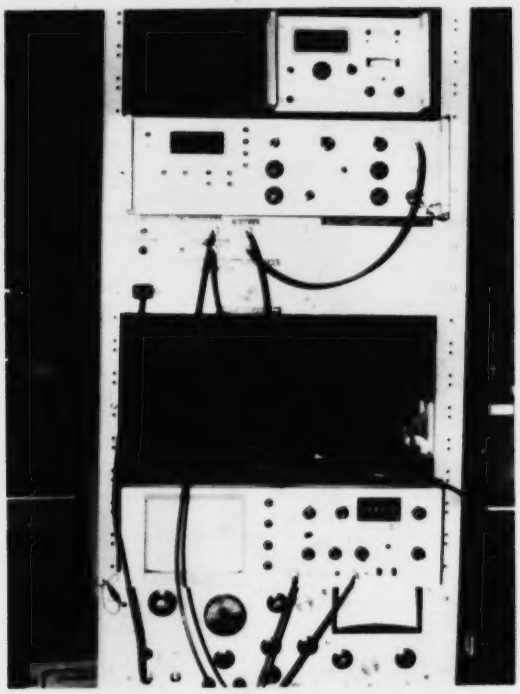

Plate 2.2 Photograph of the instrument panel

3. DATA ACQUISITION INTERFACE

3.1 Instrumentation Bus

Various instrumentation bus standards have been developed for transfer of data and remote and programmed control of smart instruments. These instrumentation busses allow more than one instrument to communicate with each other. The communication should be initiated by an intelligent interface or a computer. The instrument which transmits data over the bus is called the transmitting device or talker. The instrument which receives the data is called the receiver or listener. The computer or the interface has to initialize an instrument in order to make a particular instrument talk or listen.

Instrumentation busses are classified into parallel busses and serial links. With a parallel bus , each data block (8 bit information) is transfered through an eight line data bus. This configuration requires more hard wired lines interconnecting the instruments. Parallel busses provide high speed communication between instruments.

In serial links, each data block (8 bit information) is transfered serially, bit by bit, in one hard wired interconnecting line. Hence a serial link requires fewer number of interconnecting lines and the data communication can be made over a longer distance. Compared to parallel busses, the data transfer process in serial link is slow.

3.1.1 Handshake function

One of the salient features of any instrumentation bus is the handshaking function. Handshaking is responsible for reliable data transfer over the bus from one instrument to the other or to the computer and vice versa. Handshaking processes use two or more lines and perform pre-determined operations for the transfer of each data block, usually a byte (8 bit information). Furthermore, the handshake lines provide information to the computer about the nature and the status of data transfer at any time.

3.1.2 IEEE-488 Bus

The IEEE-488 bus is a parallel bus. It consists of 8 data lines, 8 control lines and 8 ground lines for the interconnection. Every IEEE-488 bus-incorporated instrument should be capable of performing one or more of the following functions:

1. Listener- An instrument capable of receiving data over the bus when addressed.
2. Talker- An instrument capable of transmitting data over the bus when addressed.
3. Controller- An instrument or device (usually the computer) capable of specifying the talker and listener for an information transfer (including itself).

The handshake operation is performed over three control lines and the handshake sequence is shown in figure 3.1.

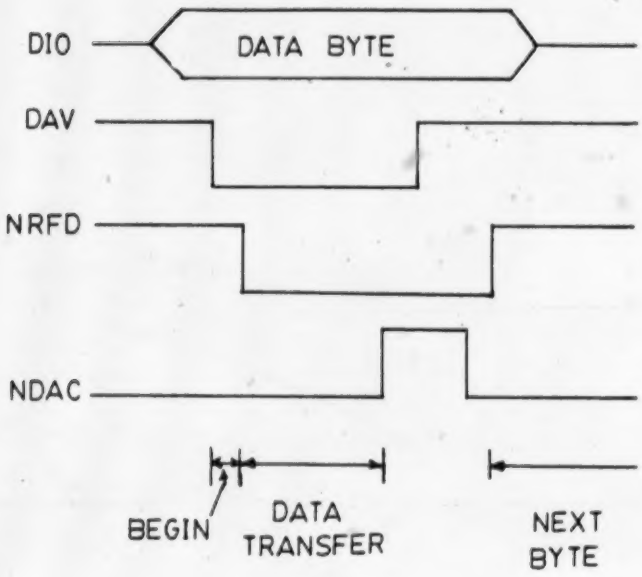

Figure 3.1 Handshake operation of IEEE-488 bus

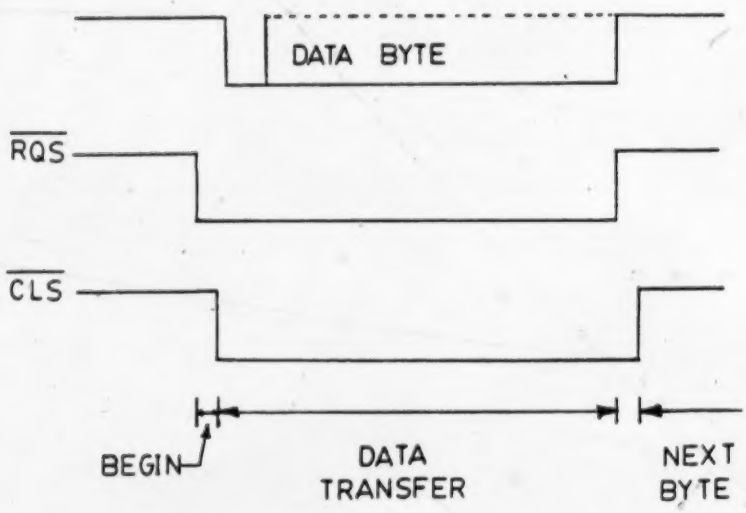

Figure 3.2 Handshake operation of RS-232 bus

3.1.3 RS-232 Link

The RS-232 link is a 20 line serial interconnection. It uses one line for transmitting data in serial format and another line for receiving data in serial format. The RS-232 uses a two wire handshake and is shown in figure 3.2. Any RS-232 incorporated instrument can be configured to transmit-only mode or receive-only mode by ignoring the handshake process. The transmit-only or receive-only mode is also called the 'dumb' mode.

The signal averager has an IEEE-488 bus and it is capable of talking and listening when it is addressed by a controller. The data logger (Fluke 2240B) samples the temperature of the absorption cell using six thermocouples, and the pressure of the absorption cell using a capacitive pressure gauge. The sampled data is transmitted through an RS-232 link in the transmit-only mode. The magnetic cassette tape recorder (Tektronix 4923), which records the data on the tape, has an RS-232 link in receive-only mode. Taking these things into account the requirements of the Data Acquisition Interface (DAI) are as follows:

1. The DAI should have an IEEE-488 controller to provide communication link between the signal averager and the DAI,
2. An RS-232 receive-only port is necessary to receive data from the data logger, and
3. An RS-232 transmit-only port to write data into the cassette tape.

The DAI is built with the above-mentioned features and is described below.

3.2 Architecture of the DAI

The intelligent Data Acquisition Interface (DAI) is based on a Z-80 microprocessor (CPU) [16] (see figure 3.3). IEEE peripheral devices manufactured by Intel (Intel 8291, 8292, 8293) are interfaced to the microprocessor, enabling the DAI to communicate with the signal averager. An asynchronous communication interface adapter (Motorola 6850) is also interfaced with the microprocessor for the DAI to communicate with the data logger and the cassette tape.

The required command sequence to be executed by the microprocessor is stored in a Read Only Memory (ROM). The program is so written that during the data transfer process the interface fetches one byte of data at a time from the signal averager and transfers it to the serial port [23].

To ensure proper data transfer, the processor is also programmed to check and perform handshake functions [20]. The program listing is shown in Appendix A.

3.2.1 Hardware organization

The Z-80 CPU has a 16 bit address bus and an 8 bit data bus. Since the address bus is 16 bits, it is capable of addressing 65535 (64 K) external memory locations. Apart from this, the CPU can address 256 external Input/Output (I/O) locations while executing I/O instructions.

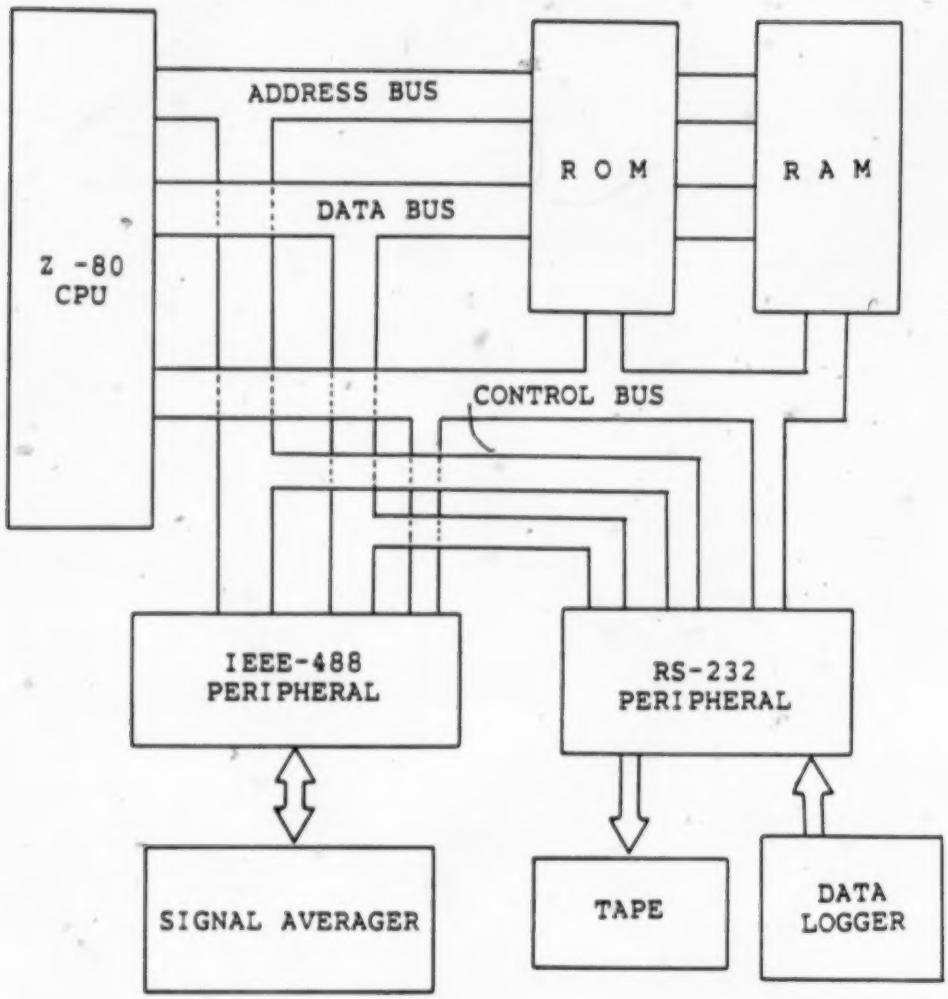

Figure 3.3 Hardware organization of the Data Acquisition Interface

The address bus, data bus and control bus of the CPU are connected to other devices through line buffers. This prevents the external devices overloding the CPU. Provision is also made to tristate the line buffers in order to isolate the CPU from the external devices. An optional step-execution circuit is incorporated with the CPU. This step-execution circuit helps the user to execute the program with one instruction at a time. This is essential for program and hardware de-bugging. The step-execution circuit can be disconnected from the CPU and the program can be executed continuously.

The memory map or the memory organization is shown in figure 3.4. The first 2K memory locations (in hexadecimal notation $0000-07FF) is alloted for ROM and the next 1K ($0800-0BFF) is alloted for Read-Write Memory (RAM). RAM is used for the stack and storing data temporarily within the DAI. The stack is a few read-write memory locations, which the CPU uses to remember its status before executing a jump or interrupt instructions. The IEEE peripheral devices are interfaced to the CPU in the memory mapped mode. In the memory mapped mode, the peripheral devices are treated exactly as a memory. To operate a memory mapped I/O device, the same instructions that are used for operating the memory can be used. The memory locations used for the Intel 8291 are $7000-7007 and for the Intel 8292 are $7800-7801.

A pair of seven segment displays and a switch are interfaced to the CPU in memory mapped mode at location

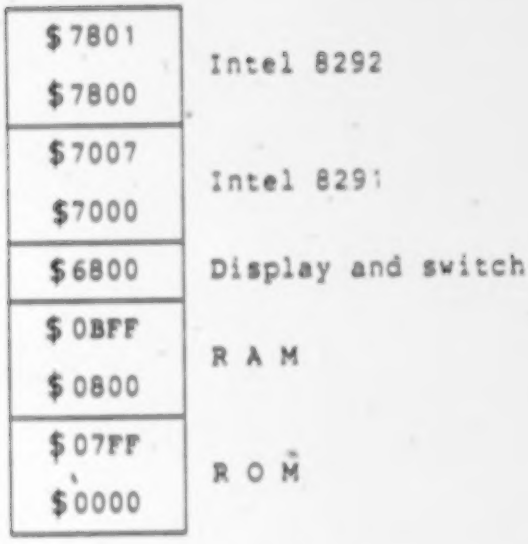

Figure 3.4 Memory organization

$6800. By closing the switch (key) the user can activate the DAI to transfer data to the tape (see figure 3.8). When the DAI is ready to transfer data to the tape, it so indicates to the user by flashing the seven segment displays. The seven segment displays were also used for de-bugging during the construction of the DAI.

The RS-232 peripheral is interfaced to the CPU in isolated I/O mode. The peripheral devices interfaced to the CPU in isolated I/O mode are treated separately from the memories. This also helps to distinguish between the IEEE peripherals and the RS-232 peripheral. I/O locations used for the RS-232 peripheral are $0001-0002. The schematics of the DAI are shown in figures 3.5-3.7.

3.3 Operation

The flow chart for the operation of the DAI is shown in figure 3.8. The power-on or hardware reset signal enables the CPU to initialize the peripherals. The DAI then performs the memory-clear operation on the signal averager and enters a stand-by state.

During this stand-by state the user can choose and set the pressure, temperature and the proper TDL current for analysing a particular line.

After the pressure, temperature and the TDL current are set, the required number of sweeps are preset using the thumbwheel switches provided on the front panel of the signal averager. The periodic ramp voltage is supplied to

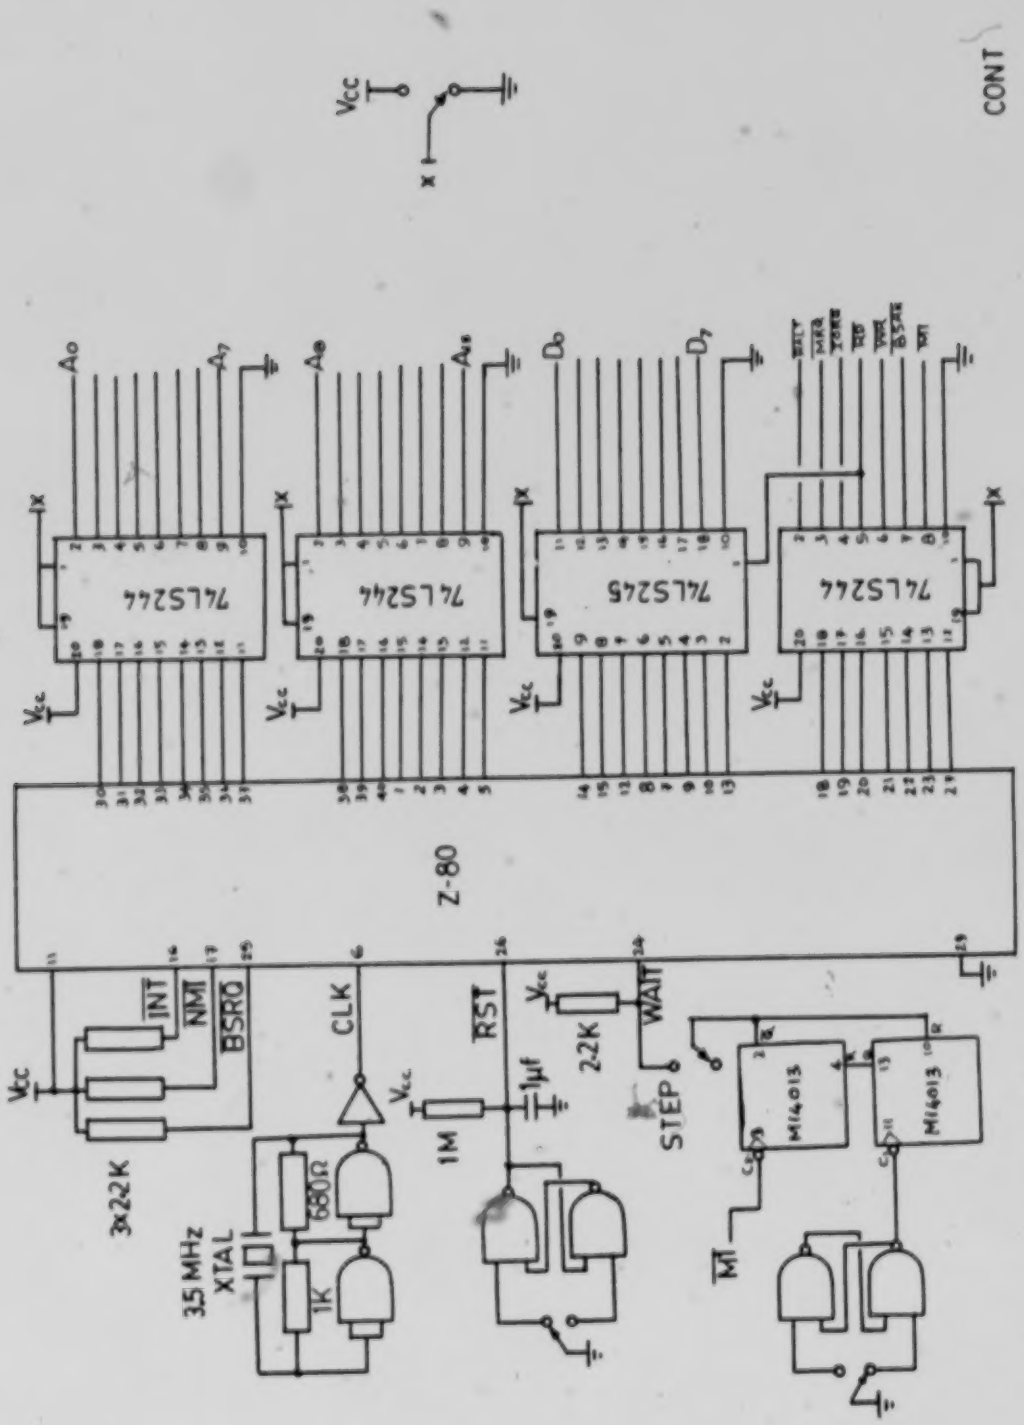

Figure 3.5 Schematic of clock, step circuit and line buffer

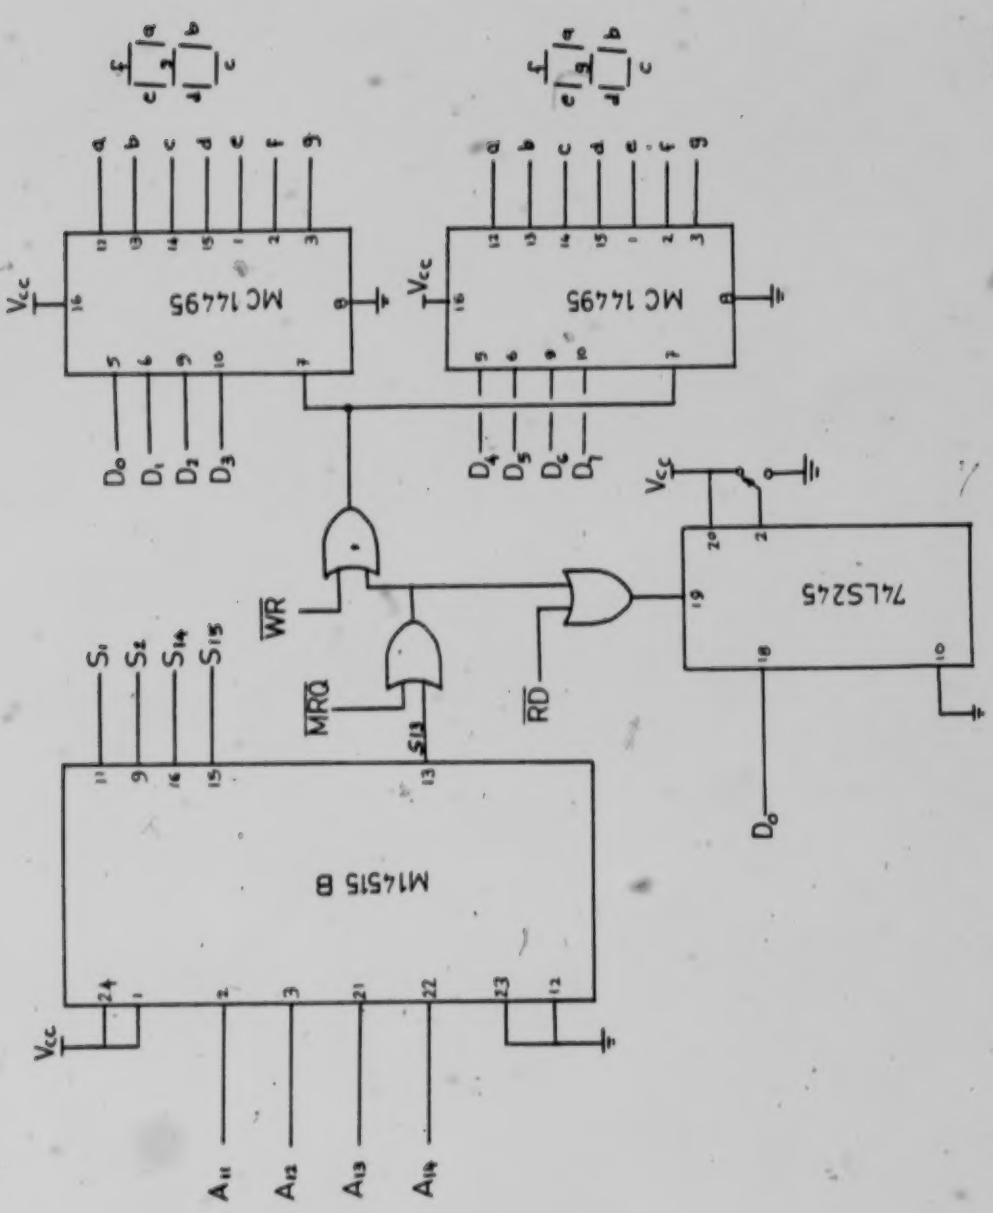

Figure 3.6 Schematic of decoding and I/O interfacing

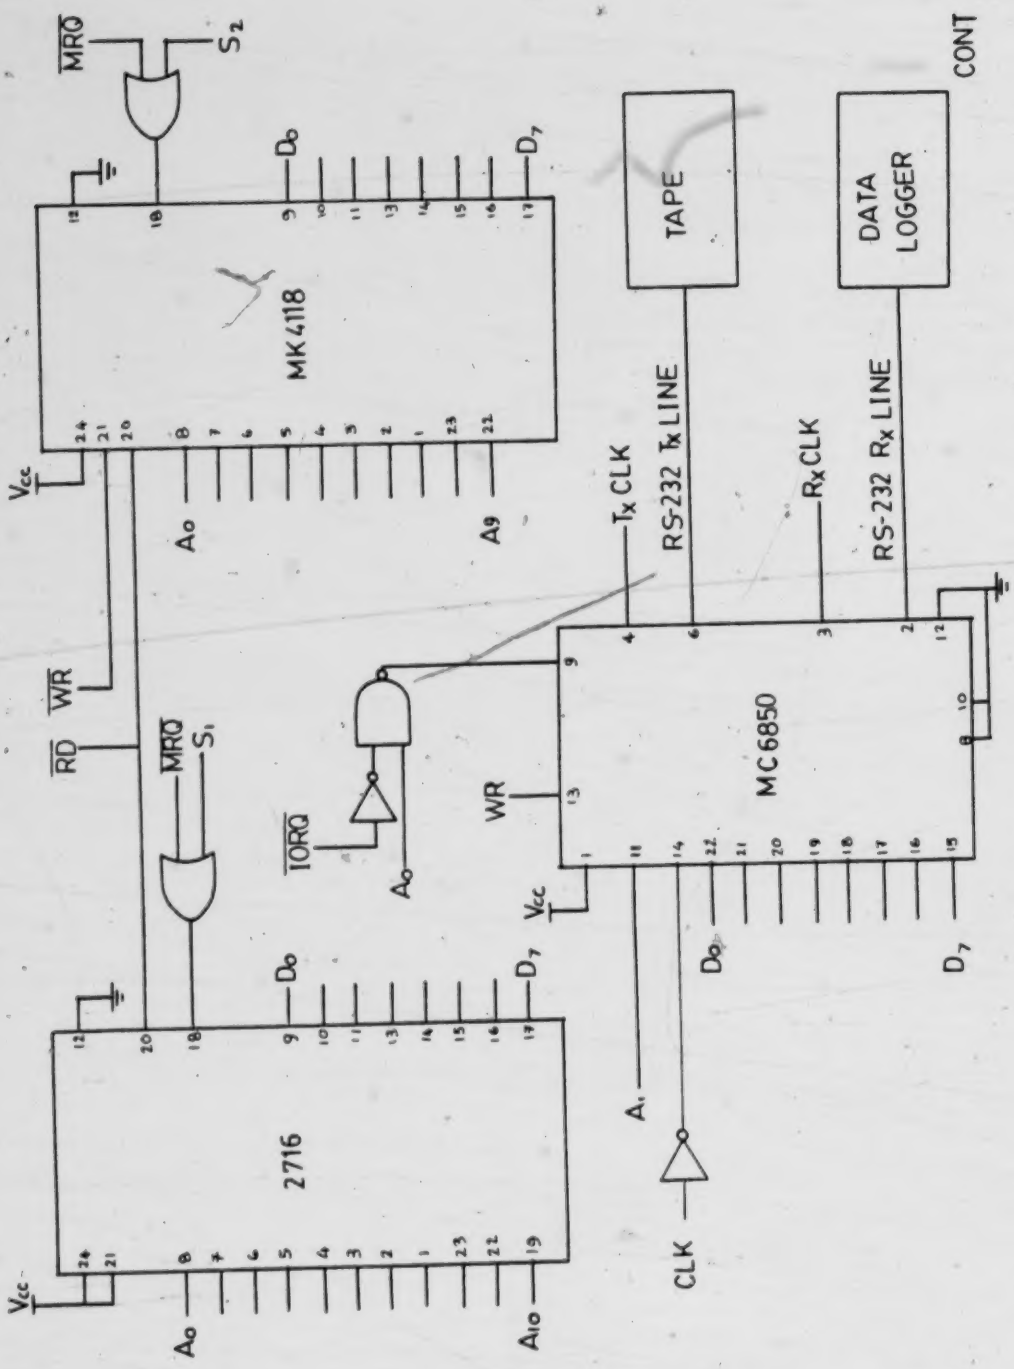

Figure 3.7 Schematic of ROM, RAM and ACIA

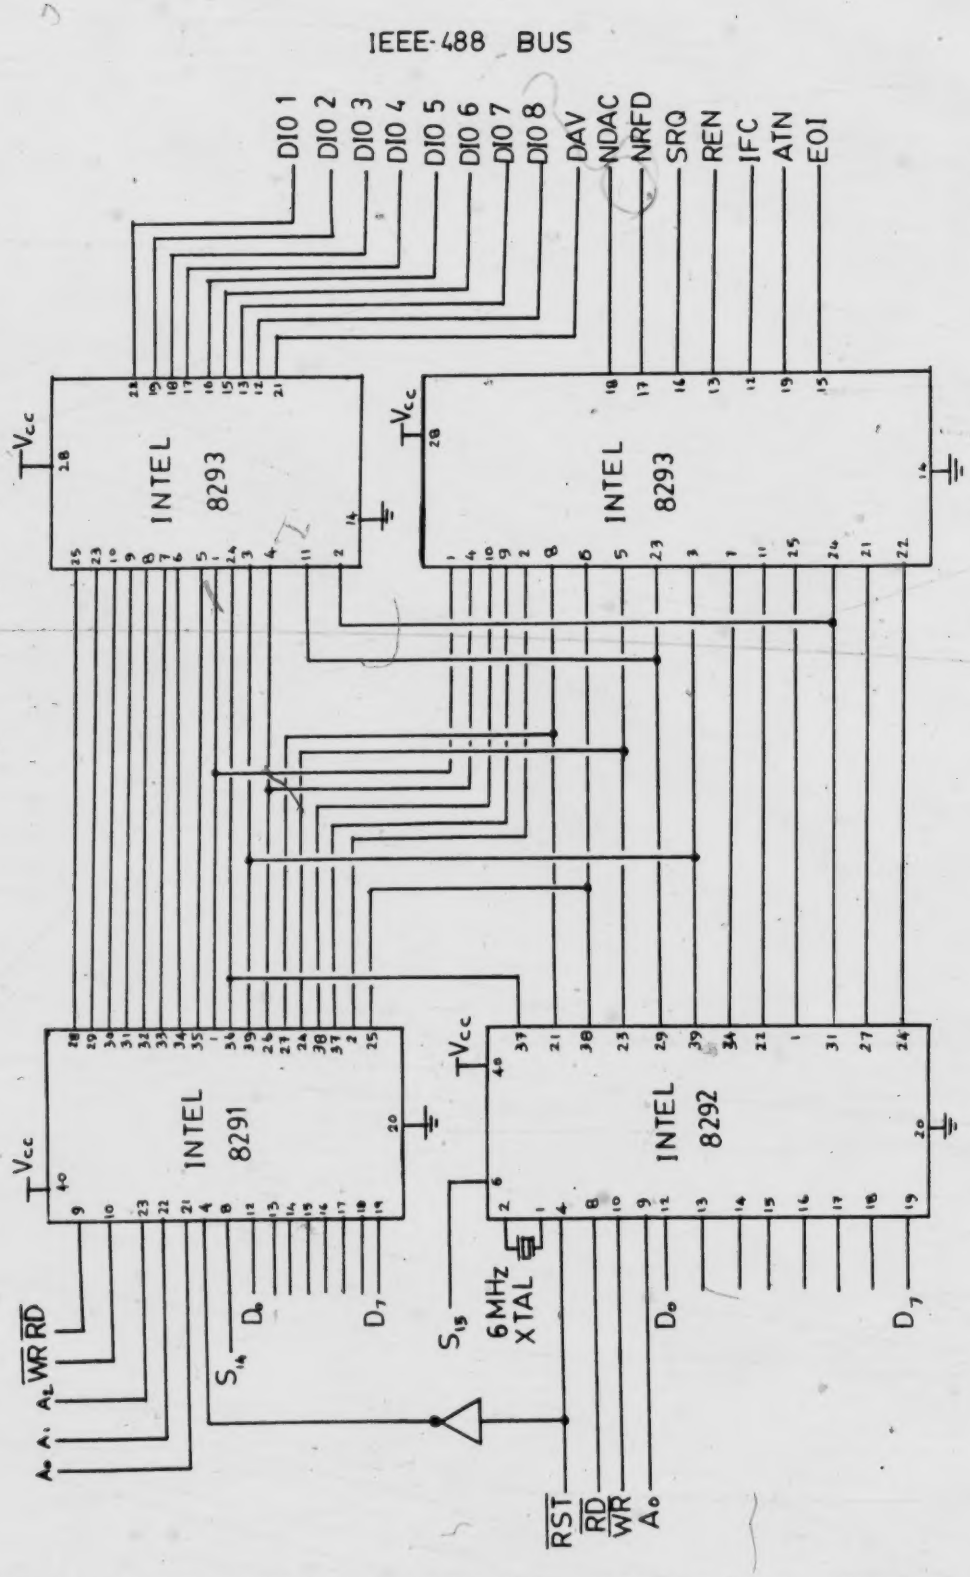

Figure 3.8 Schematic of IEEE-488 peripheral interfacing

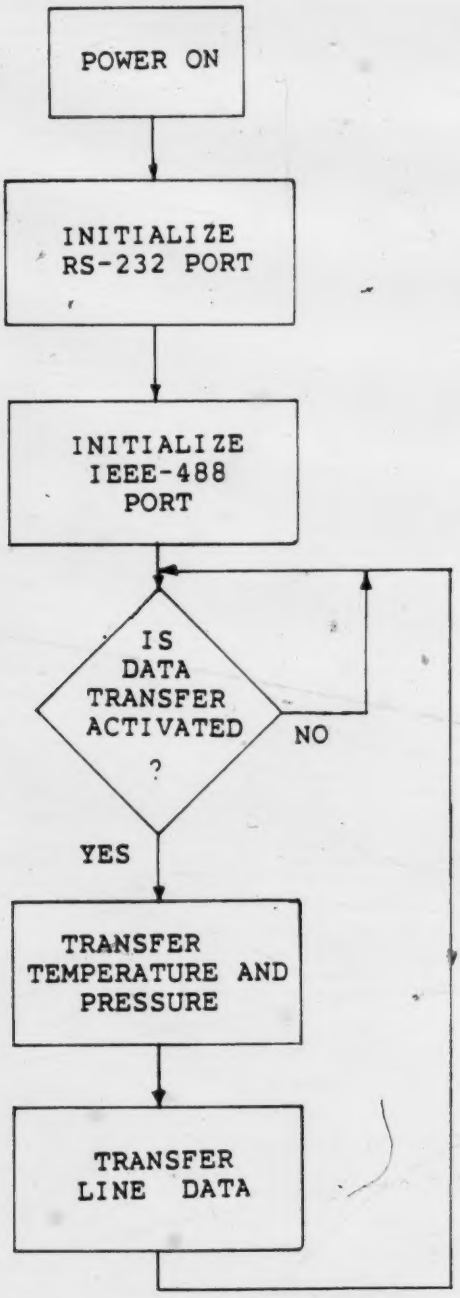

Figure 3.9 Operation Flow Chart of the Data Acquisition Interface

the Laser Control Module and the TDL is set to sweep. The output is averaged by the signal averager according to equation 2.3.1 and stores the 1024 values in its memory.

The CRT screen provided in the signal averager helps the user to view the absorption line as the signal averager receives the signal from the detector.

After obtaining the data, the DAI can be activated by a key for transfering the data for analysis. Since online transfer of data from interface to the University computer (MTS) requires excessively long MTS CPU time, the data is momentarily transfered to a cassette magnetic tape.

Since the tape recorder has an RS-232 port for communication with the outside world, the serial port in the DAI is used to transfer the data from the signal averager to the tape. The exact transfer process is shown by the flowchart of figure 3.9.

When the DAI is activated for data transfer, it also samples the pressure and temperature of the absorption cell via the RS-232 bus of the data logger and includes them along with the transferred line data. Once the transfer is complete the DAI re-enters the stand-by state awaiting the next set of data to be transferred.

The data from the tape is transferred later to MTS for analysis. The photograph of the DAI is shown in plate 3.1.

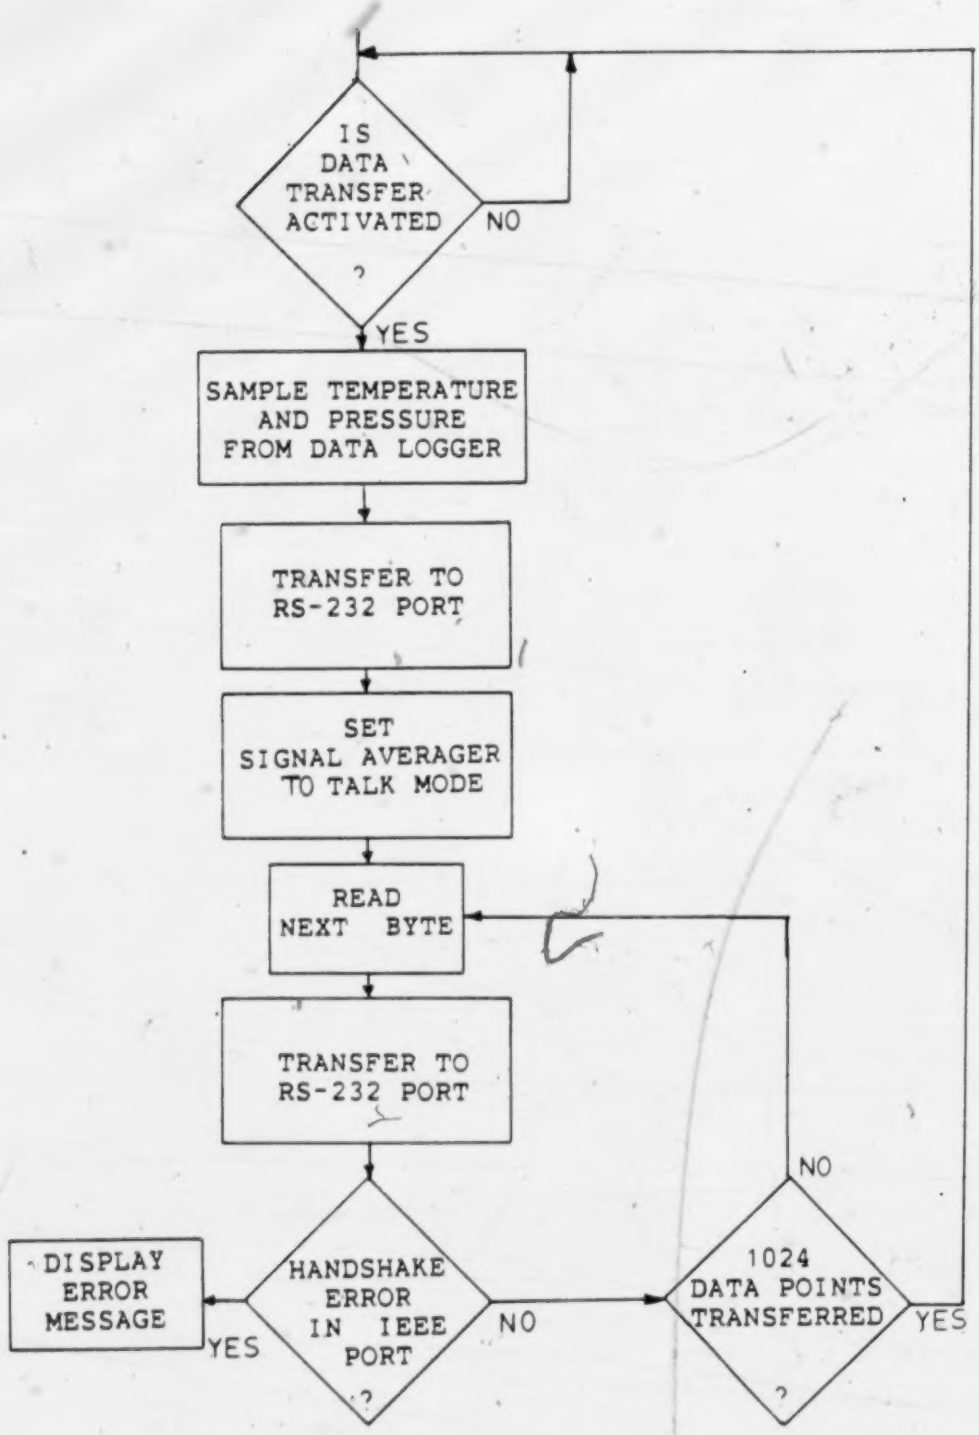

Figure 3.10 Data Transfer Flow Chart

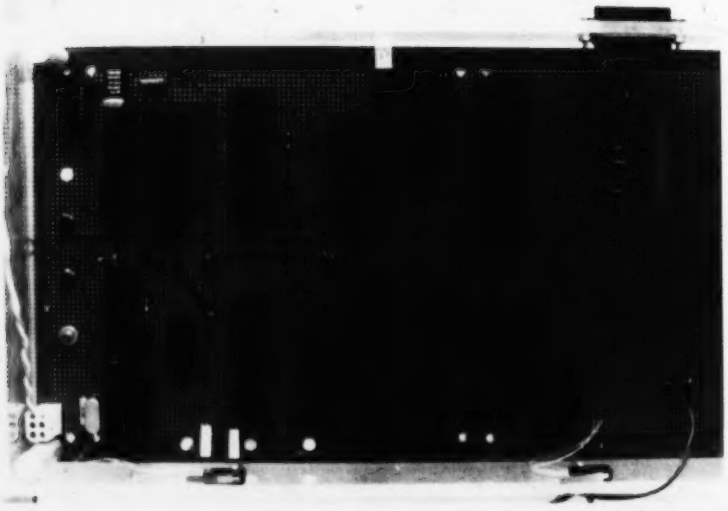

Plate 3.1 Photograph of the data acquisition interface

4. ANALYSIS

4.1 Doppler and Lorentz broadening

The spectrum of spontaneous emission in CO_2 shows a frequency spread or broadening. In a gas, broadening can be explained in terms of two phenomena:

1. Each molecule or atom at a slightly different transition frequency.
2. The finite lifetime of the excited state in an atom or molecule.

In CO_2 at low pressures (≤ 1 Torr), The broadening is due to the doppler-shift of the transition frequency of the molecules. The doppler-shifting occurs due to the finite velocity of the molecules. The doppler-broadened line shape function is given as

$$g(\nu) = 2\sqrt{\ln 2}/((D\nu)\sqrt{\pi})\ \exp-[4\ln 2\ (\nu-\nu_0)^2/(D\nu)^2] \quad ...(4.1.1)$$

where,

$$(D\nu) = 2\nu_0\ \sqrt{(2\ k\ T\ \ln 2/m\ c^2)} \quad .....(4.1.2)$$

ν = Frequency

ν_0 = Line center frequency

k = Boltzmann's constant

T = Absolute temperature

m = Mass of the molecule

c = Velocity of light

$D\nu$ is known as the doppler halfwidth. The functional dependance of $g(\nu)$ is referred to as gaussian [1] and the doppler linewidth is a function of absolute temperature.

When CO_2 is at high pressure ($\geq$100 Torr) the molecular density becomes higher and collisions between molecules becomes quite frequent. The classical view of an emitting or absorbing molecule is that the collisions interrupt the relative phase of the molecular oscillation and that of the field, causing a broadening [1]. This gives rise to the lineshape function, whose functional dependance is referred to as Lorentzian.

$$g(\nu) = (L\nu)/2\pi[(\nu-\nu_0)^2 + ((L\nu)/2)^2] \quad \ldots\ldots\ldots (4.1.3)$$

where,

$$(L\nu) = 1/(\pi\tau) \quad \ldots\ldots\ldots (4.1.4)$$

ν = Frequency

ν_0 = Line center frequency

τ = Mean uninterrupted interaction time

$L\nu$ is the halfwidth of the lorentz line and is proportional to the pressure of the active medium.

When the CO_2 pressure p is in the range $1 \leq p \leq 100$ Torr the broadening becomes a combination of Lorentz and Doppler broadening. Usually the combination of the Lorentz and

Doppler broadening function is expressed in terms of the absorption coefficient $k(\nu)$

$$k(\nu) = (k_o y/\pi)\int_{-\infty}^{+\infty}[\exp(-t^2)/(y^2+(x-t)^2)]\,dt \quad ...(4.1.5)$$

where,

$k_o = (S/(D\nu))\ \sqrt{\ln 2/\pi}$

$y = (L\nu/D\nu)\ \sqrt{\ln 2}$ .....(4.1.5.1)

$x = ((\nu-\nu_o)/D\nu)\ \sqrt{\ln 2}$.....(4.1.5.2)

S = Line strength

ν_o = Frequency at line center

ν = Frequency at which $k(\nu)$ is to be measured

The function $k(\nu)$ is known as the Voigt function [3], [15].

4.2 Analysis of the Voigt function

4.2.1 Classification of the regions

The Voigt function shown in equation 4.1.5 is the real part of the complex probability function [11]

$$W(z) = i/\pi\int_{-\infty}^{+\infty}[\exp(-t^2)/(z - t)]\,dt \quad .....(4.2.1)$$

where,

$$i = \sqrt{-1}$$

$$z = x + iy$$

This function is not easy to integrate analytically and numerical methods are used to evaluate it.

In order to achieve fast convergence and good accuracy, four different numerical methods are used for four different regions [10]. The four different regions are shown graphically in figure 4.1. In each region W(z) is evaluated and the real part of the solution is taken. The four different numerical methods used are described in detail below.

4.2.2 Taylor series expansion method

In region I, a Taylor series expansion method is used [10]. Equation 4.2.1 can be expressed in the form

$$W(z) = \exp(-z^2) + (2i/\sqrt{\pi})\, F(z) \qquad (4.2.2)$$

where,

$$F(z) = \exp(-z^2)\int_0^z [\exp t^2]\, dt \qquad (4.2.3)$$

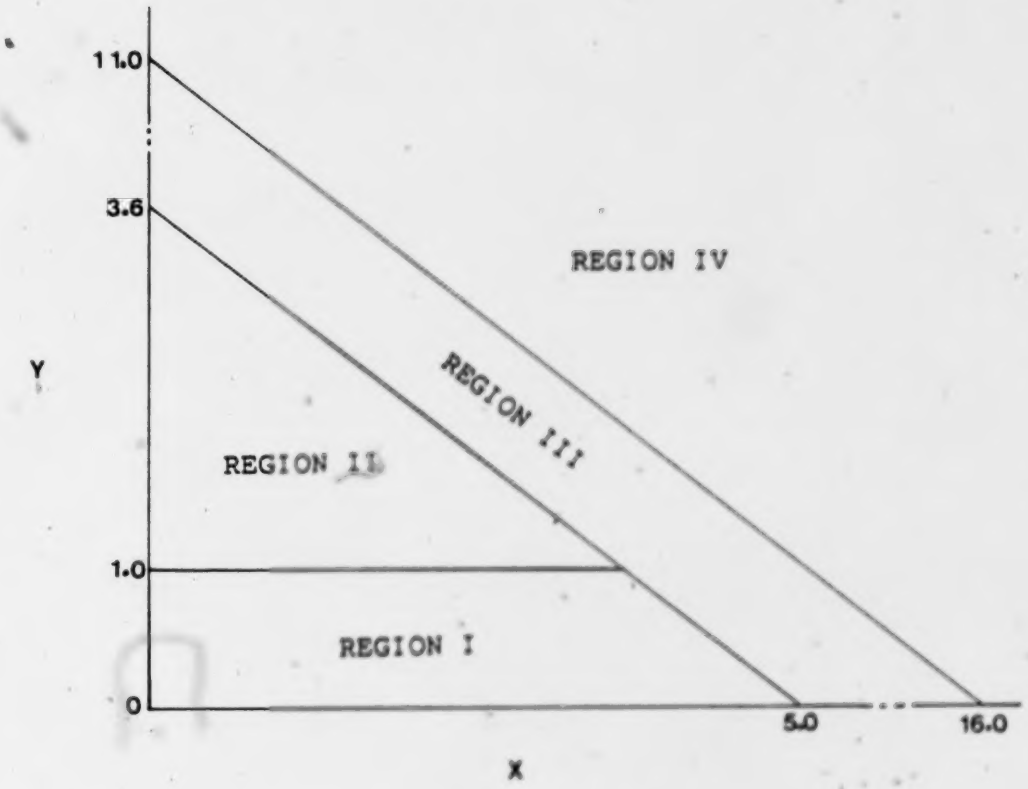

Figure 4.1 Computational regions used for different numerical methods

F(z) is known as Dawson's function [13]. Dawson's function on the real axis can be calculated using the Chebyshev expansion formula [14]

$$F(x) = \sum_{n=0}^{20} a_n(5)\, T_{2n-1}(x) \qquad \text{.....(4.2.4)}$$

where

$a_n(5)$ = Chebyshev coefficients

T_{2n-1} = Chebyshev polynomial

T_{2n-1} are calculated using the three term recurrence relationship

$$T_0(x) = 1$$

$$T_1(x) = x$$

$$T_n(x) = 2 \times T_{n-1}(x) - T_{n-2}(x) \qquad \text{.....(4.2.5)}$$

In order to achieve rapid computation, Dawson's function F(x) is calculated for 25 values of x, equally spaced in the range 0 to 5. Taylor coefficients are also calculated at these 25 points using the relations

$$d_0 = F(x)$$

$$d_1 = 1 - 2 \times d_0$$

$$d_{n+1} = -(2/(n+1))\,(x\, d_n + d_{n-1}) \qquad n=1, 2, \ldots$$

After obtaining the Taylor coefficients, F(x) at any x is found by another Taylor series and W(z) is evaluated using the formula

$$W(z) = \exp(-z^2)+(2i/\sqrt{\pi})\ (F(x)+ F'(x)y+...) \quad ..(4.2.6)$$

where

$F'(x)$ = First derivative of $F(x)$

$F''(x)$ = Second derivative of $F(x)$

The real part of W(z) gives the value of the Voigt function. Four terms are used for the expansion in equation 4.2.6.

4.2.3 Continued fraction method

In region II, W(z) can be evaluated using the continued fraction method [9], [12]

$$W(z) = 1/\sqrt{\pi}\left\{ \frac{1}{z+} \frac{.5}{z+} \frac{1}{z+} \frac{1.5}{z+} \frac{2}{z+} \ldots \right\} \quad .....(4.2.7)$$

Ninteen terms are used in equation 4.2.7 to obtain sufficient accuracy.

4.2.4 Four-point and two-point gaussian quadrature

In region III and IV the Voigt function is asymptotic to the x axis. One of the best numerical integration methods for asymptotic functions is gaussian quadrature [11]. In region III, W(z) is evaluated using four-point gaussian quadrature

$$W(z) = \sum_{k=1}^{4} a_k/(z - t_k) \quad \ldots\ldots\ldots\ldots\ldots\ldots\ldots\ldots (4.2.8)$$

where,

a_k are the gaussian quadrature weights associated with the points t_k.

In region IV, two-point gaussian quadrature is used to evaluate W(z)

$$W(z) = \sum_{k=1}^{2} a_k/(z - t_k) \quad \ldots\ldots\ldots\ldots\ldots\ldots\ldots\ldots (4.2.9)$$

(Please refer to the program listing in Appendix A for the numerical values of a_k and t_k)

A FORTRAN program is written to compute the normalised absorption coefficients, $k(\nu)/k(\nu_0)$, for any x and y.

4.3 Computation of experimental absorption coefficient

The data transfered by the DAI consists of the temperature and pressure of the absorption cell and three sets of 1024 memory data points representing the transmitted intensity when the absorption cell is filled with CO_2 gas, when the absorption cell is empty and when the etalon is introduced in the optical path. Figure 4.2 shows these three data in graphical form. The absorption coefficient k is calculated using equation 1.2 for all the 1024 memory data points.

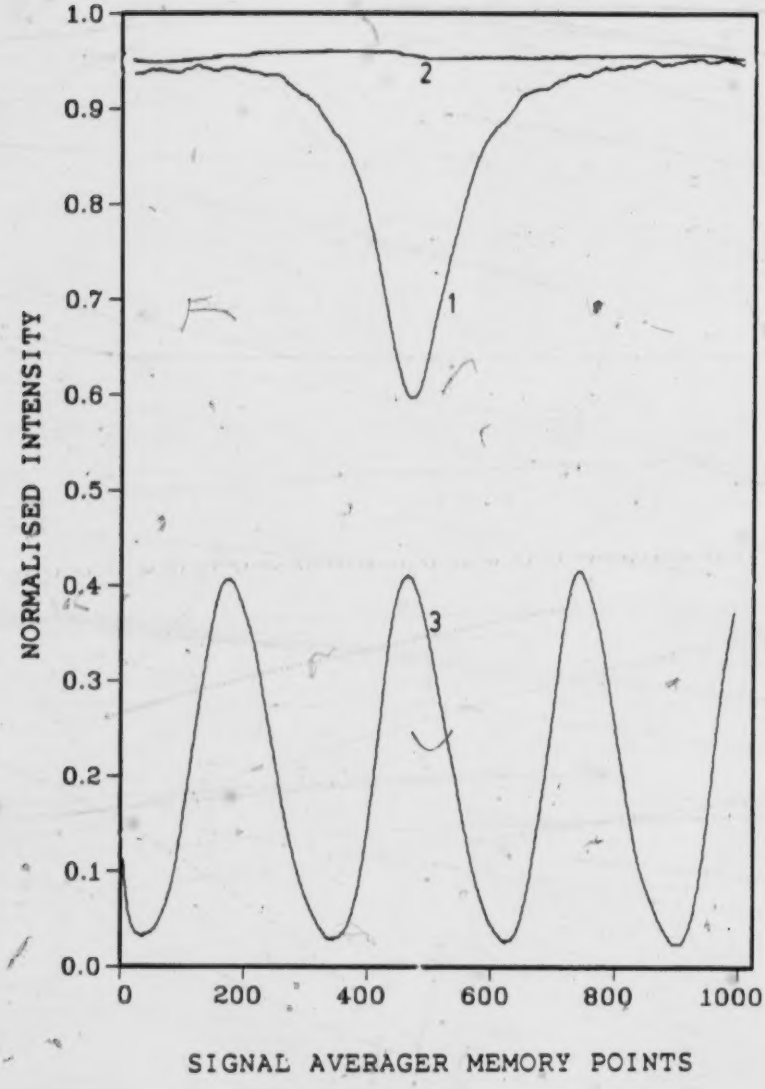

Figure 4.2 The data obtained from the experiment in graphical form 1.Absorption cell filled with CO_2 2.Absorption cell empty 3.Etalon introduced in the optical path

4.3.1 Determination of line center

The maximum absorption coefficient appears at the line center. But it cannot be assumed that the memory point corresponding to the maximum absorption coefficient is the line center, because of the random noise appearing in the system. In order to determine the line center with more accuracy a least squares fit is done.

The maximum absorption coefficient value and its memory point are first determined and the absorption coefficient values of 100 memory points in the neighbourhood (50 memory points on either side of the maximum value) of the maximum value are selected. A parabola is fitted to these 100 values using least squares curve fitting and the peak of the parabola is taken as the maximum absorption coefficient and its corresponding memory point is taken as the line center frequency.

4.3.2 Frequency calibration using the etalon

Once linecenter has been determined, the frequency distribution for the rest of 1023 memory points must be calculated. The etalon produces an output trace with at least three peaks when introduced in the optical path (see figure 4.2). The least squares fit of the parabola is used to locate the coordinates of the peaks and the frequency difference between adjacent peaks is given by equation 2.5.1. From the coordinates of the peaks the number of memory points between the peaks is calculated which is then

equated to the frequency difference obtained from equation 2.5.1. The number of memory points on the etalon trace between the first and the second peak and the number of memory points between second peak and the third peak was always found to be equal, within one memory point. Hence the output of the TDL is assumed to be linear with respect to the sweeping current. Since we know the frequency of the line center and its corresponding memory point, the entire range of 1024 memory points is now calibrated in terms of x as in equation 4.1.5.2 [26].

The absorption coefficients are normalised with respect to the peak value. Figure 4.3 shows the normalised absorption coefficient versus x for the P(16) line of the 10.4μm CO_2 laser transition obtained from the experiment.

4.4 Fitting the Voigt function to the experimental data

4.4.1 Initial fitting

The two variables associated with the Voigt function(4.1.5) are x and y. Since x is now known, the theoretical function which gives the best fit of the experimental data determines a y value. From equation 4.1.5.1, $L\nu$ can then be calculated.

In order to save computer time, initially an approximate y is calculated using a successive approximation method near the half maximum points (where the value of the normalised absorption coefficient is $\simeq$0.5). The iteration is

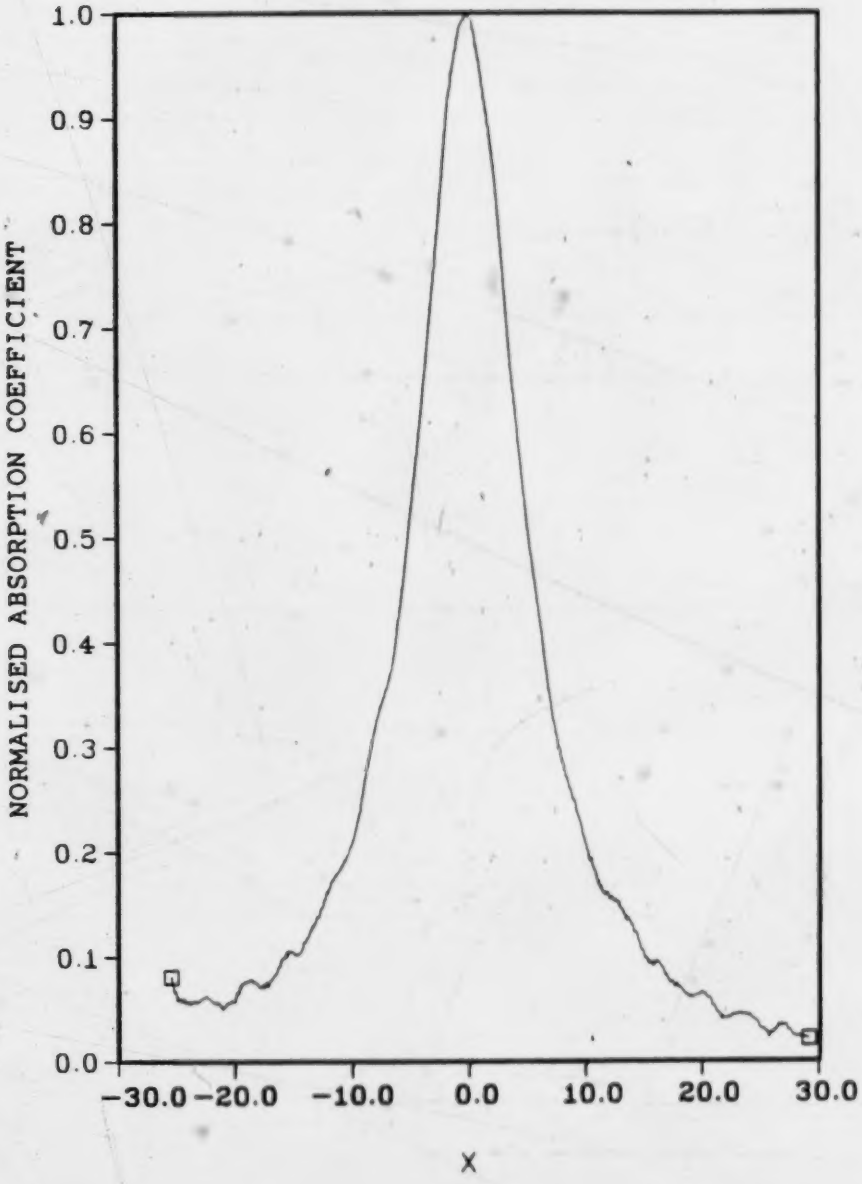

Figure 4.3 Absorption coefficient calculated with respect to x. CO_2 P(16)line at 50 Torr and 380K.

terminated when the obtained y value gives a theoretical normalised coefficient within 0.002% of the experimental value. This particular y makes the theoretical Voigt function to pass through at least three experimental values-the two half maximum points and the peak.

4.4.2 Fitting using sum of squared errors

To obtain an optimum y which gives the best fit, the sum of the squared errors between the theoretical and the experimental values is used. With the y value obtained from the general fitting, the squared error is computed at each of the 1024 points and summed. Using the successive approximation method, an optimum y is computed by minimising the sum of squared errors. For all set of data the minimum value (sum of squared error) was found to be within 0.140. The sets of data which could not produce a minimum error within 0.140 is rejected. Figure 4.4 shows the Voigt function fitted to the experimental data.

Figure 4.5 - 4.8 shows the voigt fitting for the experimental data obtained for different pressures at 418K.

With the optimum y, the Lorentz width responsible for the broadening is calculated using equation 4.1.5.1. Using equation 1.4.1 the dependancy of L_ν on temperature and pressure is determined, and this comparison is outlined in the following chapter.

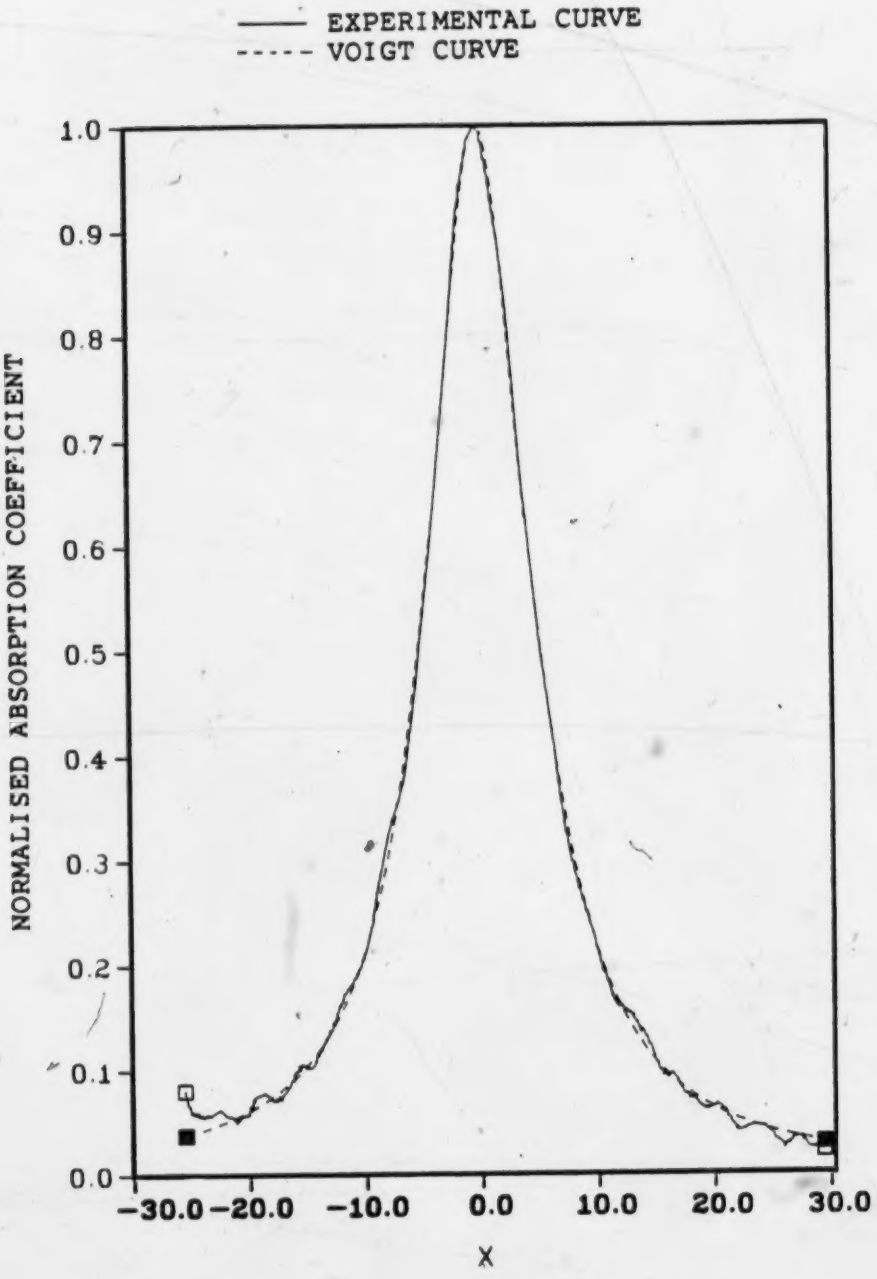

Figure 4.4 Theoretical Voigt function fitted to the experimental data. CO_2 P(16)line at 50 Torr and 380K

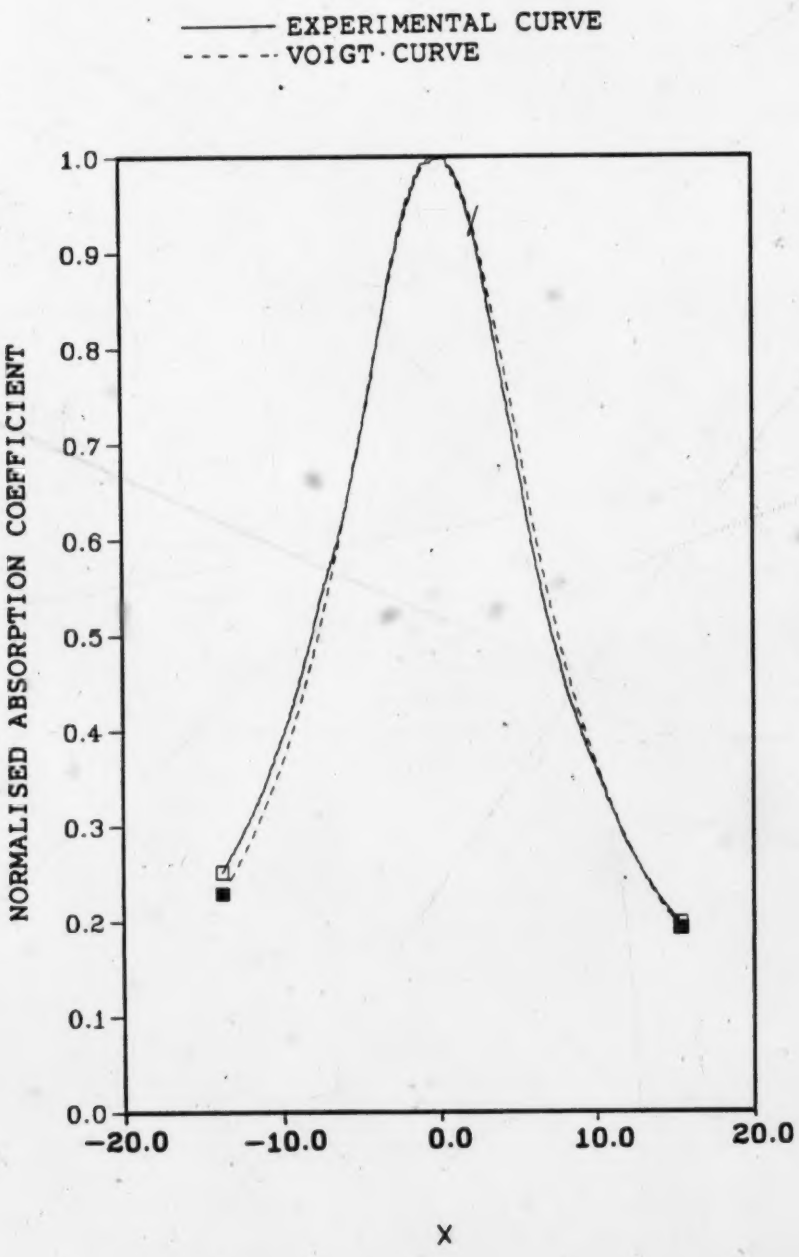

Figure 4.5 Voigt fitting for CO_2 P(16) line at 101 Torr and 418K

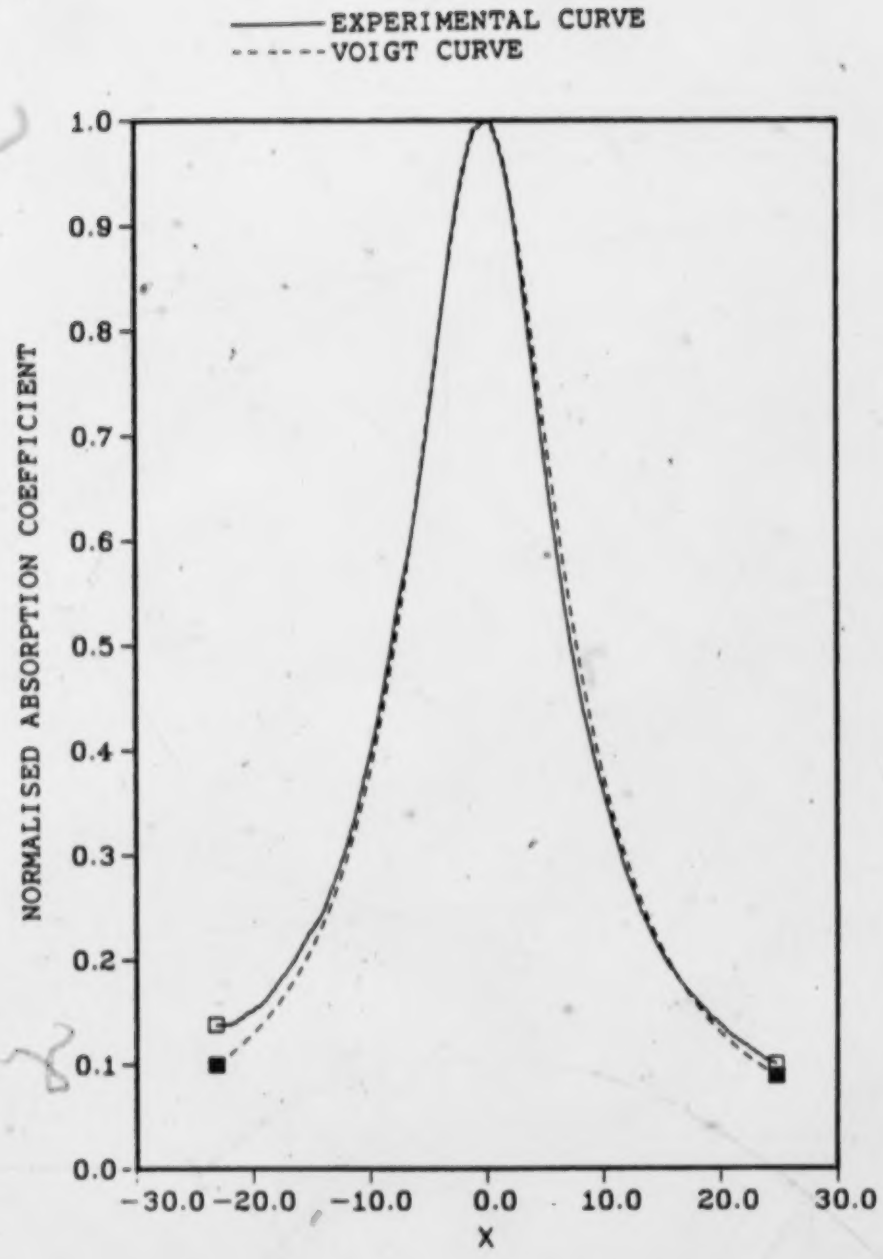

Figure 4.6 Voigt fitting for CO_2 P(16) line at 80 Torr and 418K

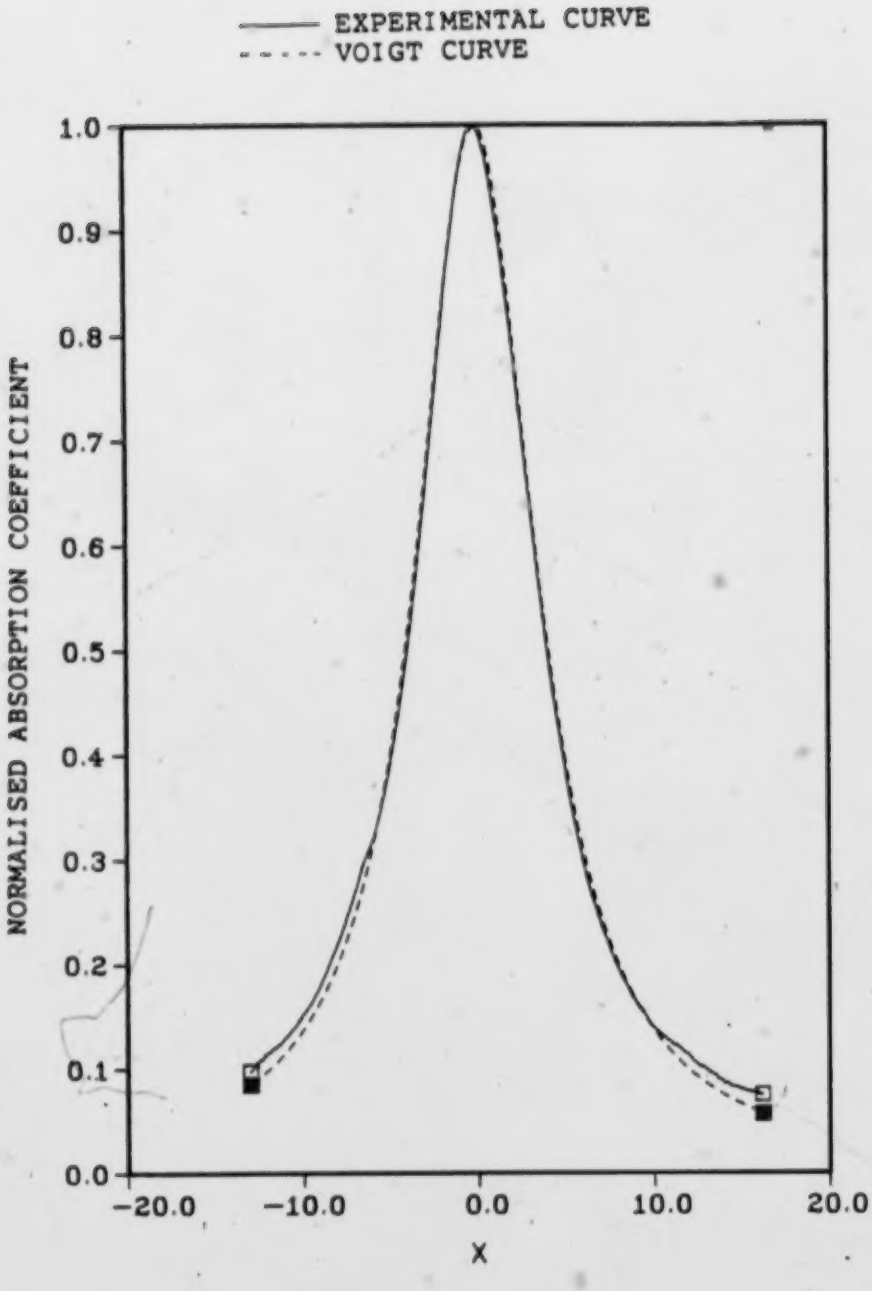

Figure 4.7 Voigt fitting for CO_2 P(16) line at 49 Torr and 418K

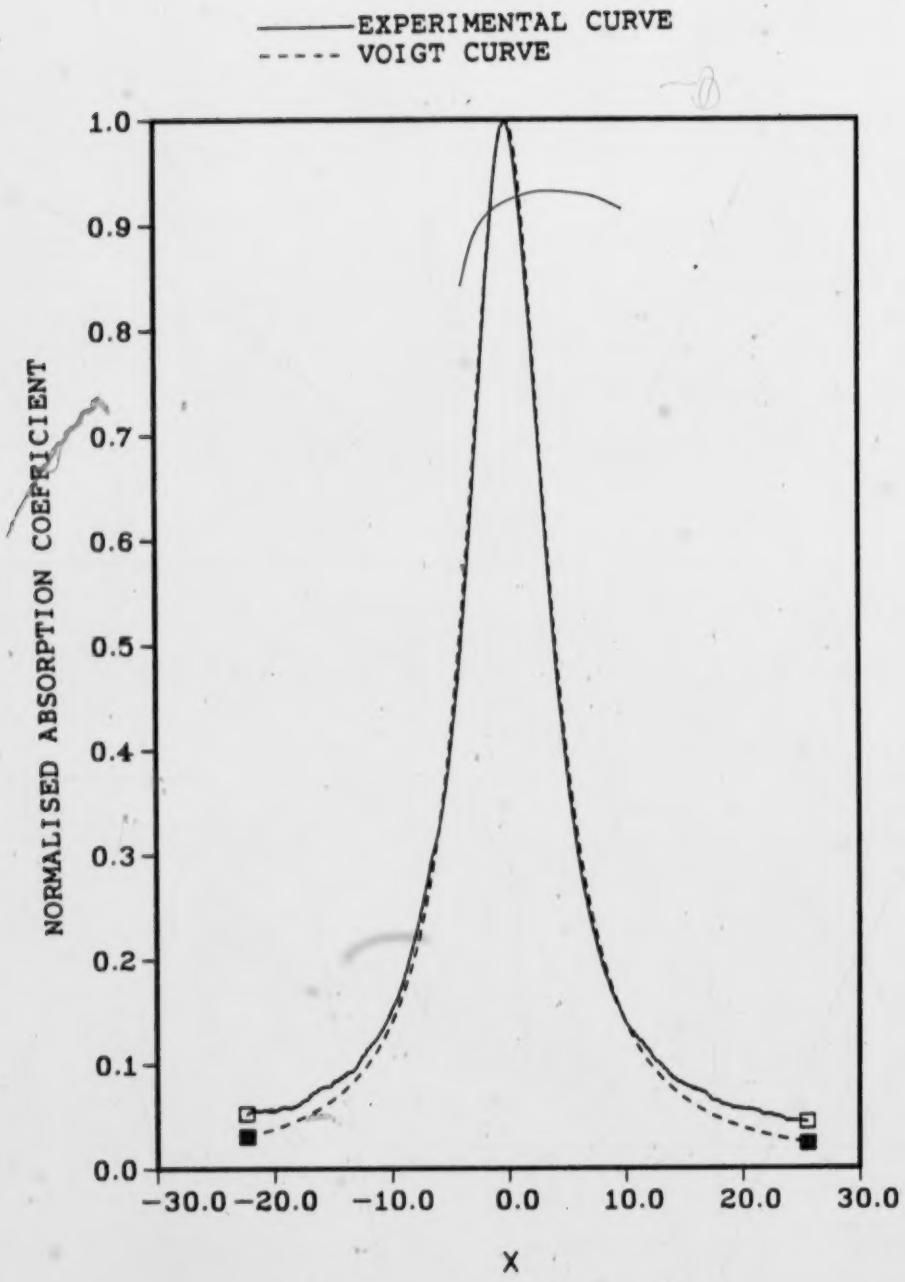

Figure 4.8 Voigt fitting for CO_2 P(16) line at 29 Torr and 418K

5. RESULTS AND CONCLUSIONS

5.1 Obtained results

Table 5.1 shows the experimental and the fitted Voigt function halfwidths for the P(16) line. The experimental Voigt halfwidth is obtained from the halfwidth of the experimental absorption lineshape. The fitted Voigt halfwidth is computed from the theoretical Voigt function which gives the best fit for the experimentally obtained absorption lineshape. Table 5.1 lists the pressure and temperature conditions of the absorption cell at the time of data acquisition. It also shows the value of y and $L\nu$ calculated for each case, from equation 4.1.5.1.

Reference [30] gives an approximate expression relating the Voigt halfwidth to Doppler halfwidth and Lorentz halfwidth. This expression can be modified and written as

$$L\nu = A (B - \sqrt{C + D}) \quad \text{.....(5.1.1)}$$

where,

$A = 1/0.198 \ln 2$

$B = (1 + 0.099 \ln 2) V\nu$

$C = (1 - 0.099 \ln 2)^2 V\nu^2$

$D = 0.396 \ln 2 \, D\nu^2$

$V\nu$ = Voigt halfwidth

$L\nu$s calculated using the equation 5.1.1 agree closely with the $L\nu$s calculated using the equation 4.1.5.1.

The Voigt function fit (fig 4.4) indicates that the lineshape of the CO_2 P(16) line closely exhibits a Voigt

lineshape for the pressure range 10-100 Torr and temperatures above 370K.

Figures 5.1-5.4 are the graphs showing the linear relationship of $L\nu$ with pressure. The straight line functions are least square fits of the calculated $L\nu$s, constrained to pass through the origin. The confidence interval of $L\nu$, for each pressure at which the measurements are taken, is calculated using the relationship described in [31] and [32]. From that the maximum and minimum $L\nu$ is calculated using the formula

$$\overline{L\nu} = \bar{L}\nu \pm 2.132\ (sd) \qquad (5.1.2)$$

where,

$\bar{L}\nu$ = $L\nu$ calculated from the fitted straight line equation at a pressure

$\overline{L\nu}$ = is the maximum and minimum $L\nu$

sd = standard deviation of $L\nu$

Figure 5.5 shows the behaviour of $L\nu$ with respect to temperature. The values of $L\nu$ were obtained from the straight line plots of figures 5.1-5.4 at 50 Torr pressure. From the points so obtained , a straight line is fitted to the plot of $\ln(L\nu)$ versus $\ln(T)$. the slope of this straight line is the exponent of T in equation 1.4.1. The straight

line fit is also made for the two sets of $\bar{L}_{\nu}$s obtained from equation 5.1.2. The slopes of these two fittings give the two extreme values of the exponent, which is taken for the error estimate of the exponent. Reference [27] indicates a value around 0.5 for the exponent and [3] gives a value of 0.75. The experiment conducted here yields a maximum value of 0.56 , an average value of 0.48 and a minimum value of 0.41. The average value of 0.48 is in close agreement with [27].

The fit in the wings of the absorption profile shows more error that at other points (see figure 4.3). This error is caused because of the noise appearing in the system. Since the absolute value of the absorption coefficient is small in the wings, the noise introduces more error than it does at the line center. Also the fly-back of the ramp signal used for sweeping the TDL is suspected to introduce error at the leading wing of the profile. In order to investigate the amount of error these wings could have caused, the calculation of the L_{ν}s is made by fitting the Voigt function for the measured absorption coefficient values above 10% of the maximum. The results were very close to the L_{ν}s calculated from fitting the Voigt function for all the data points, differing at most by 4 MHz. Table 5.2 lists the results obtained for the calculation made for absorption coefficient values above 10% of the maximum.

5.2 Further Research

The potential of the DAI can be expanded by providing extra operating memory. The processor can also be programmed to control many of the experimental conditions such as pressure, temperature and sweep-control. The absorption experiment can be used for further research in the analysis of CO_2 lines, such as linewidths and lineshapes of other CO_2 transitions, optical broadening coefficients due to CO_2 and foreign gases such as N_2 and He, and lineshape measurement of other gases absorbing in the infrared.

5.3 Conclusions

The data acquisition system was constructed and used for the CO_2 laser transition lineshape and linewidth experiment. Interfacing the IEEE-488 peripheral chips (Intel 8291, 8292, 8293) to the Z-80 CPU was simple forward because Intel and Zilog family of chips have many hardware features in common. Interfacing the RS-232 peripheral chip (Motorola ACIA 6850) to the CPU initially appeared to be difficult. After a series of analysis and testing of the hardware features of the ACIA, the interfacing became possible with fewer chips for decoding and controlling.

The Voigt lineshape for CO_2 laser transitions at the pressure range 10-100 Torr has been confirmed by this experiment. This systematic experiment also shows that the Lorentz halfwidth varies as $T^{-0.88}$ which is in close aggrement with the theoretically proposed model [27].

It is hoped that the work and results reported in this thesis will be useful for further research in the analyis of CO_2 transition lines and in developing microprocessor-based data acquisition systems.

Table 5.1 Experimentally calculated line parameters and the line parameters obtained from Voigt function fitting for the CO_2 P(16) line

Temp K	Pressure Torr	Experimental Voigt halfwidth MHz	Fitted Voigt halfwidth MHz	Calculated Lorentz halfwidth MHz	y
380	80.0	294.5	271.1	267.5	7.5
	69.8	258.8	251.5	247.5	7.0
	59.0	216.4	211.5	207.0	5.8
	50.1	188.1	182.8	177.2	5.0
	38.9	152.8	143.3	136.5	3.8
	30.3	127.1	116.0	113.1	3.2
418	101.0	346.3	357.1	345.4	9.1
	80.0	283.8	282.0	278.7	7.3
	69.4	242.9	244.6	240.3	6.3
	49.8	180.2	161.7	153.7	4.0
	39.4	149.3	137.0	137.2	3.6
	29.0	117.5	105.1	100.5	2.6
449	105.5	342.8	347.2	334.8	8.8
	68.7	229.6	228.7	224.0	5.8
	59.1	198.7	205.5	198.1	5.2
	49.3	169.6	171.1	164.3	4.3
	45.7	147.5	147.8	140.0	3.6
	29.8	107.7	103.8	98.2	2.5
526	101.4	307.4	311.3	307.3	7.6
	79.4	242.9	247.0	242.0	6.0
	70.9	210.2	212.7	207.0	5.1
	55.3	167.9	164.1	157.2	3.9
	45.9	140.4	136.5	132.7	3.3
	30.1	114.9	110.6	104.8	2.6

Table 5.2 Line parameters obtained from the Voigt function fitting for absorption coefficient values above 10% for the CO_2 P(16) line

Temp K	Pressure Torr	Experimental Voigt Halfwidth MHz	Fitted Voigt Halfwidth MHz	Calaulated Lorentz Halfwidth MHz	y
380	80.0	294.5	271.2	267.5	7.5
	69.8	258.8	250.1	246.1	6.9
	59.0	216.4	211.5	207.0	5.8
	50.1	118.1	182.8	177.2	5.0
	38.9	152.8	143.3	136.5	3.8
	30.3	127.1	116.0	113.1	3.2
418	101.0	346.3	345.0	342.3	9.0
	80.0	283.8	274.6	270.3	7.1
	69.4	242.9	238.7	234.3	6.1
	49.8	180.2	161.7	153.7	4.0
	39.4	149.3	136.0	135.7	3.5
	29.0	117.5	106.5	101.3	2.6
449	105.5	342.8	339.1	335.4	8.8
	68.7	229.6	226.3	221.7	5.8
	59.1	198.7	202.6	195.9	5.1
	49.3	169.6	168.1	161.2	4.2
	45.7	147.5	145.5	137.8	3.6
	29.8	107.7	103.8	98.2	2.5
526	101.4	307.4	307.4	303.3	7.5
	79.4	242.9	244.8	238.8	5.9
	70.9	210.2	210.0	204.6	5.1
	55.3	197.9	163.1	155.6	3.8
	45.9	140.4	136.0	131.9	3.2
	30.1	114.9	109.0	104.0	2.5

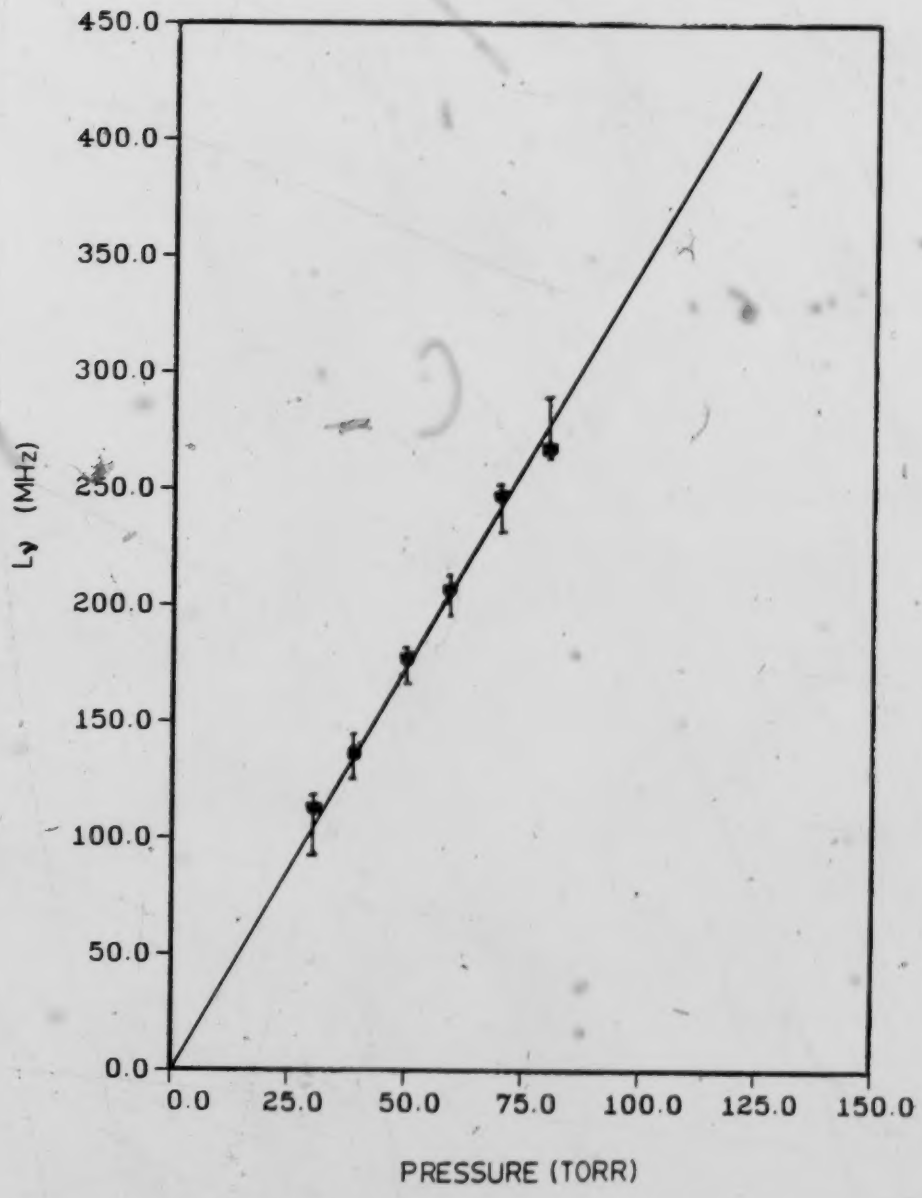

Figure 5.1 Linewidth dependance on pressure at 380K; P(16)line

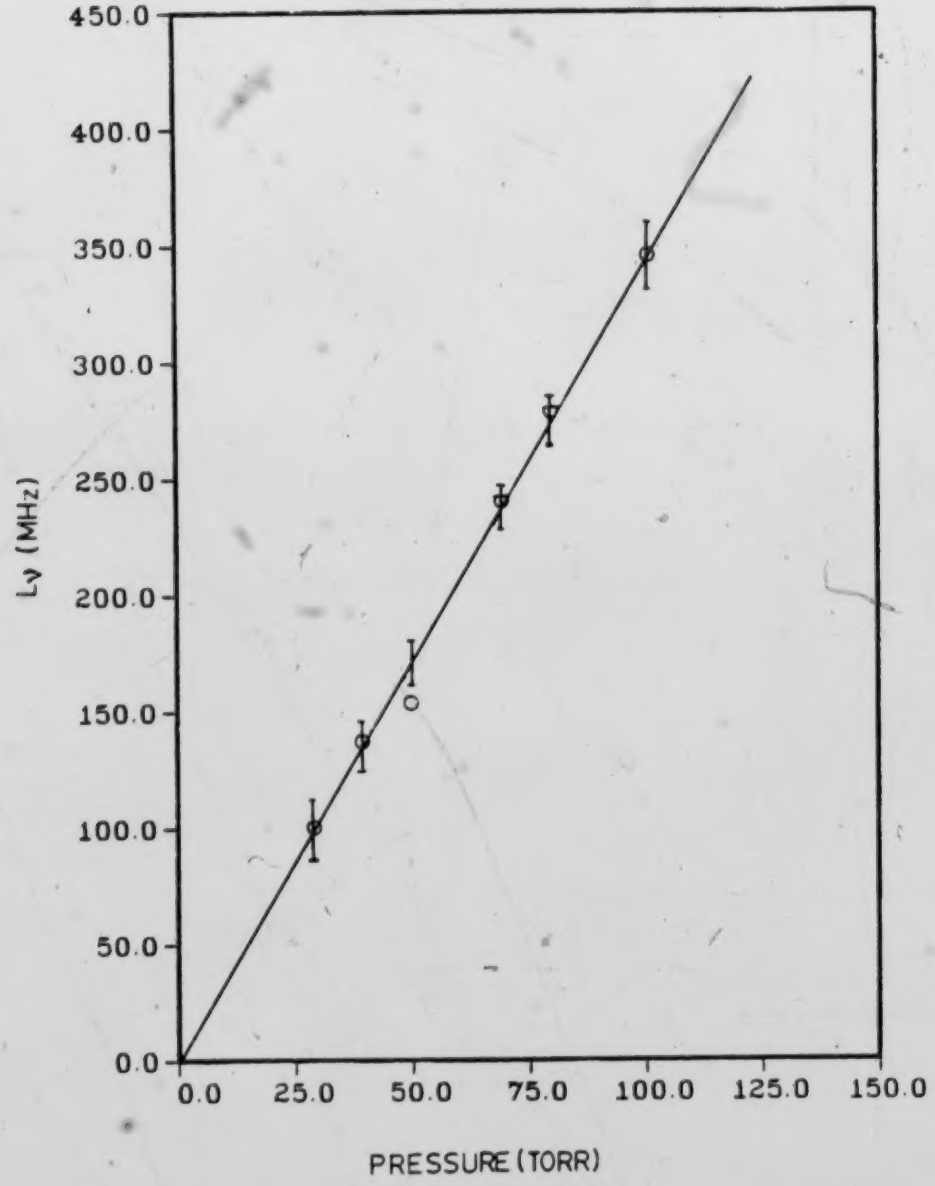

Figure 5.2 Linewidth dependance on pressure at 418K; P(16) line

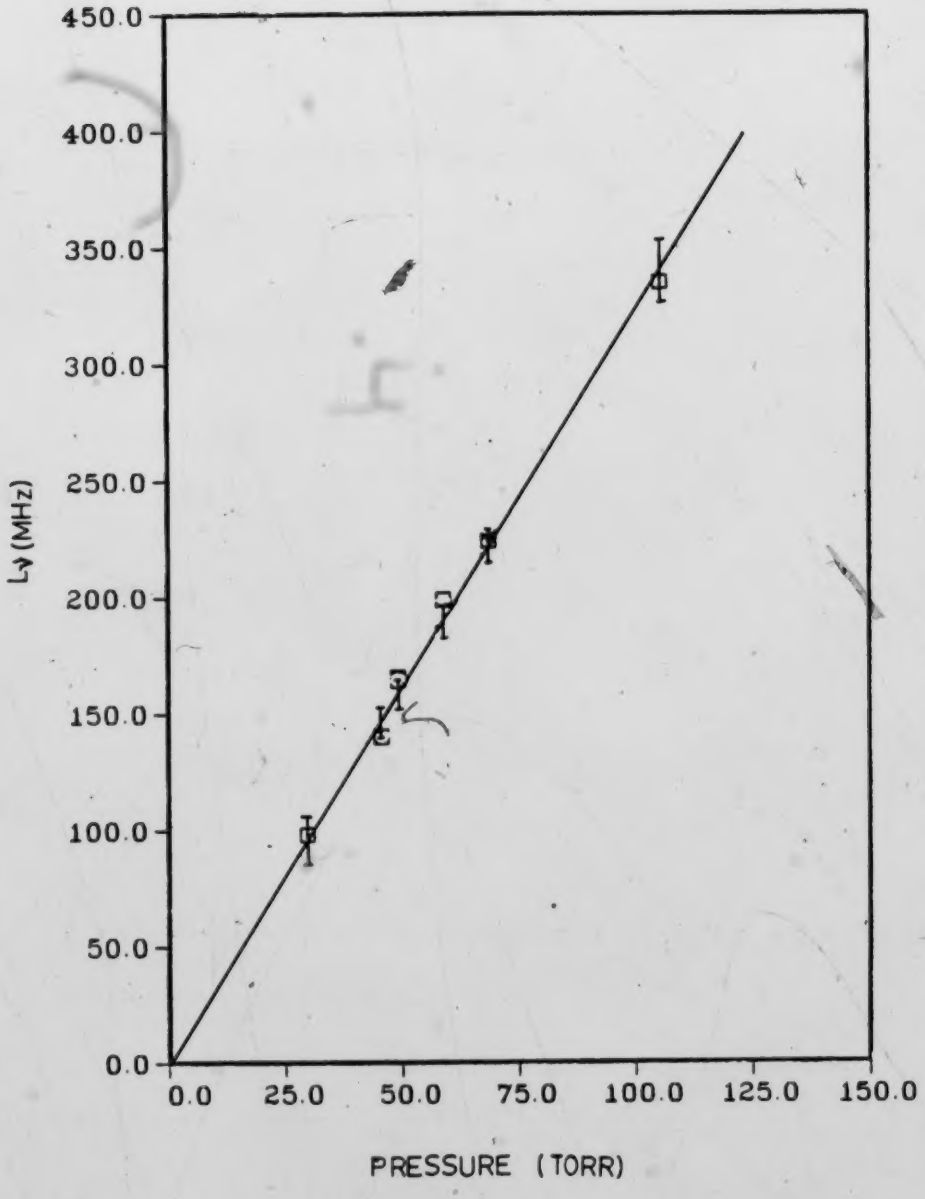

Figure 5.3 Linewidth dependance on pressure at 449K; P(16) line

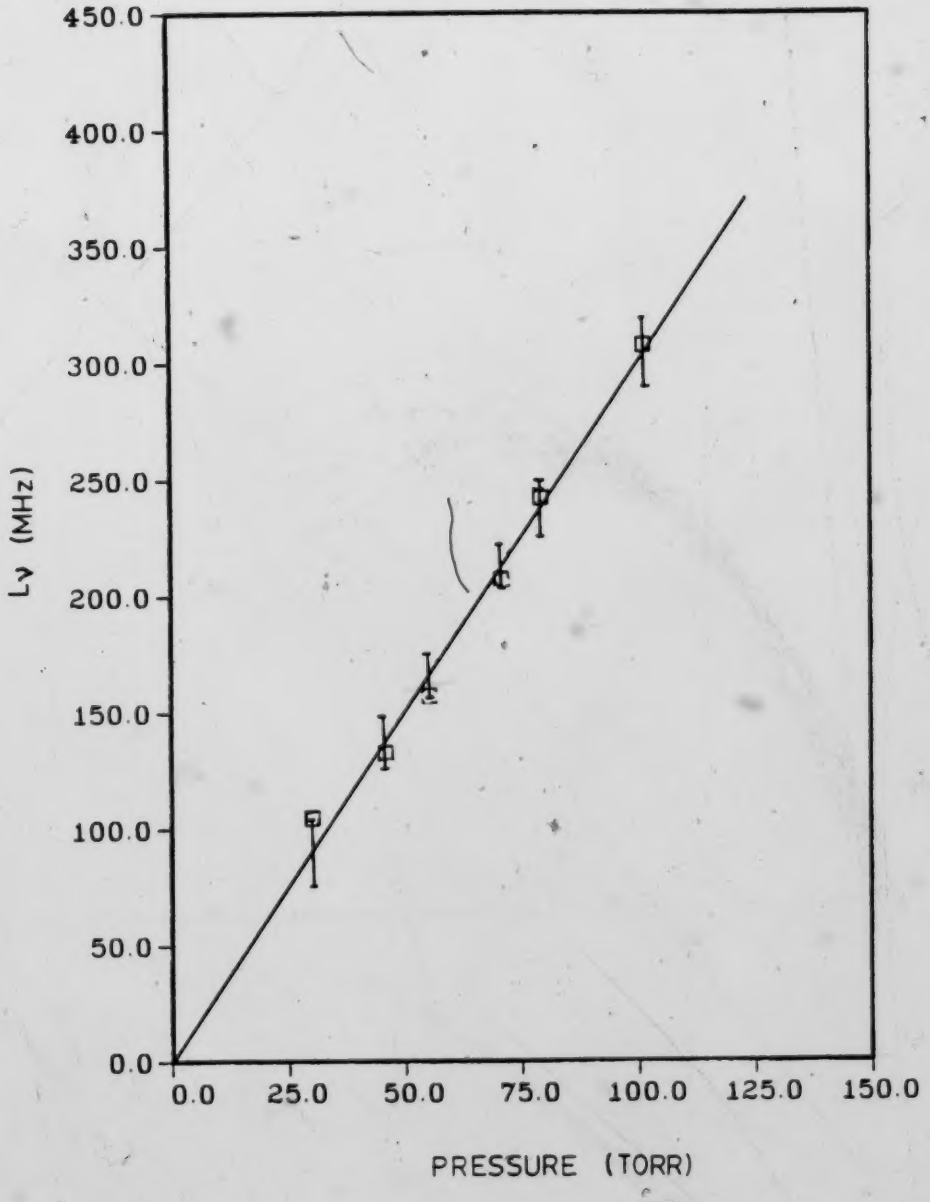

Figure 5.4 Linewidth dependance on pressure at 526K; P(16) line

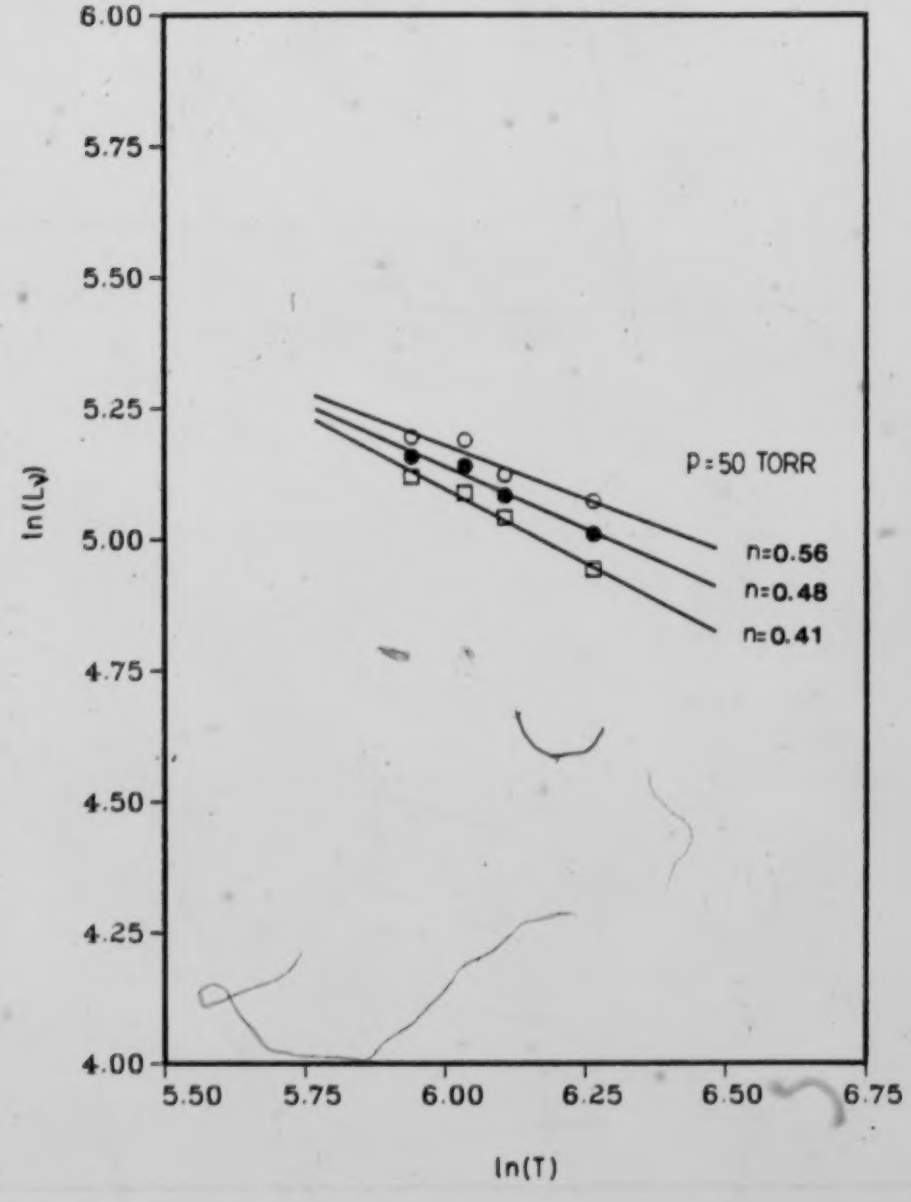

Figure 5.5 Linewidth dependance on temperature

REFERENCES

[1] A. Yariv, "*Introduction to Optical Electronics*", Holt, Reinhart and Winston, New York, 1976.

[2] A.G. Mitchell and M.W. Zemansky, "*Resonance Radiation and Excited Atoms*", University Press, Cambridge, 1961.

[3] R.S. Eng and M.W. Mantz, "Tunable Diode Laser Spectroscopy of CO_2 in 10-μm Spectral Region-Lineshape and Q-Branch Head Absorption Profile", *Journal of Molecular Spectroscopy*, Vol 74, No 3, pp.331-344, March 1979.

[4] J. Reid, D.T. Cassidy and R.T. Menzies, "Linewidth Measurements of Tunable Diode Lasers using Heterodyne and Etalon Techniques", *Applied Optics*, Vol 21, No 21, November 1982.

[5] A.M. Robinson and N. Sutton, "High Temperature Absorption in the 10.4μm band of CO_2, *Applied Optics*, Vol 18, No 3, February 1979.

[6] A.M. Robinson and N. Sutton, "Infrared Absorption at 10.4μm in CO_2 at Elevated Temperatures", *Applied Optics*, Vol 16, No 10, October 1977.

[7] R.L. Abrams, "Broadening Coefficients for the P(20) CO_2 Laser Transition, *Applied Physics Letters*, Vol 25, No 10, November 1974.

[8] J. N-p. Sun, M.L. Olson, D.L. Grieble and P.R. Griffiths, "Rapid-scanning Computer-Controlled Tunable Diode Laser Spectrometer", *Applied Optics*,

Vol 19, No 16, August 1980.

[9] C. Young, "Calculation of the Absorption Coefficient fo Lines With Combined Doppler and Lorentz Broadening", *J. Quant. Spectrosc. Radiat. Transfer.*, Vol 5, pp. 549-552.

[10] S.R. Drayson, "Rapid Computation of the Voigt Profile", *J. Quant. Spectrosc. Radiat. Transfer.*, Vol 16, 1976.

[11] V.N. Faddeyeva and N.M. Terent'ev, "*Tables of Probability Integral for Complex Arguement*", Pergamon Press, New York, 1961.

[12] B.H. Armstrong, "Spectrum Line Profiles: The Voigt Function", *J. Quant. Spectrosc. Radiat. Transfer.*, Vol 7, pp. 61-88, 1967.

[13] M. Abramowitz and I.A. Stegun, "*Handbook of Mathematical Functions*", National Bureau of Standards Applied Mathematics Series 55, U.S. Government Printing Office, Washington, D.C., U.S.A., pp. 298, 1965.

[14] D.G. Hummer, "Expansion of Dawson's Function in a Series of Chebyshev Polynaomials", *Math. Comput.*, Vol 18, pp. 317-319, 1964.

[15] S.S. Penner, " *Quantitaive Molecular Spectroscopy and Gas Emissivities*, Addison-Wesley Publishing Company, Inc., Mass, U.S.A., 1959.

[16] William Barden, Jr., "*The Z-80 Microcomputer Handbook*", Howard W. Sams & CO., Inc., Indiana,

U.S.A., 1981.

[17] Motorola Microprocessors Data Manual, Motorola Inc., pp. 4.527-4.535, U.S.A., 1981.

[18] Model 4203 Signal Averager Operating and Service Manual, "EG&G Princeton Applied Research, N.J., U.S.A.

[19] LS-3 Laser Source Spectrometer Operator's Manual, "Laser Analytics, Inc., M.A., U.S.A., 1979.

[20] Tutorial Description of the Hewlett-Packard Interface Bus, "Hewlett-Packard Company", November 1980.

[21] EIA Standard RS-232-C, "Electronic Industries Association", Engineering Department, Washington, D.C., U.S.A., 1969.

[22] Rodnay Zaks, "Microprocessor Interfacing Techniques", Sybex Inc., U.S.A., 1979.

[23] Rodnay Zaks, "Programming the Z-80", Sybex Inc., U.S.A., 1979.

[24] Kenneth W. Nill, "Spectroscopy With Tunable Laser Diodes", Laser Focus, pp 32-37, February 1977.

[25] Stephen Jacobs, Murray Sargent III, James F. Scott, and Marlan O. Scully, " Laser Applications to Optics and Spectroscopy", Addison-Wesley Publishing Company, Reading, Mass., U.S.A., 1973.

[26] R.A. McClatchey, W.S. Benedict, S.A. Clough, D.E. Burch, R.F. Calfee, K. Fox, L.S. Rothman, and J.S. Garning, "AFCRL Atmospheric Absorption Line

Parameters Compilation", *Air Force Cambridge Research Laboratories*, L.G. Hanscom Field, Bedford, Mass., U.S.A., 1973.

[27] A.M. Robinson and J.S. Weiss, "Temperature Dependance of the Linewidth of the CO_2 Laser Transitions", *Canadian Journal of Physics*, Vol 58, N 4, 1980, pp512-515.

[28] R. Ely and T.K. McCubbin, Jr., *Appl. Opt*, Vol 9, 1230(1970).

[29] A.R. Strilchuk and A.A. Offenberger. *Appl. Opt*, Vol 12, 993(1973).

[30] John F. Kielkopf, "New approximation to the voigt function with applications to spectral-line profile analysis", *J. Opt. Soc. Am*, Vol 63, 1973, pp 987-995.

[31] Ramakaht Khazanie, *Elementary Statistics in a World of Applications*, Goodyear Publishing Company, California, U.S.A., 1979, pp377-379.

[32] Thomas A. Ryan Jr, Brian L. Joiner, and Barbara F. Ryan, *Minitab Student Handbook*, Duxbury Press, North Scituate, Mass., U.S.A., 1976, pp 162-163.

APPENDIX A

FORTRAN PROGRAM FOR DATA TRANSFER AND VOIGT FIT

```
      INTEGER DATA1(1024), DATA2(1024),
     1 J(1024), IE(1024)

      DOUBLE PRECISION DAT1(1024), DAT2(1024),
     1 ANS(1024), T1(7), T2(7), FE(1024),
     1 X(1024), Y(1024), EI(1024), YA(50),
     1 DVT(10,1024), ERR(1024), SR(50), SQR(50)


      N = 100

C     LINE CENTER FREQUENCY
      FE0=(3.0E+10*947.74197894)/1.0E+06

C     CONSTANTS FOR DOPPLER WIDTH
C         CALCULATION

      BK = 1.38062 E-23
      CM = 73.0 E-27
      VC = 3.0 E+08
      GN = 0.8325545

      TT=0.0
      DO 3 I=1, 6
      CALL FREAD(5, 'R:', T1(I))
      CALL FREAD(7, 'R:', T2(I))
      TT=TT+T1(I)+T2(I)
    3 CONTINUE

      TEM= (TT/12.0)+273.0

C     CALCULATION OF DOPPLER WIDTH
      RT = SQRT((2.0*BK*TEM)/(CM*VC*VC))
      DDW = 2.0*FE0*RT
      DDL = DDW*GN


      CALL FREAD(5, 'R:', P1)
      CALL FREAD(7, 'R:', P2)
      PRS= P2*10.0


      DO 10 I = 1, 1024
      CALL FREAD(5, 'I:', DATA1(I))
      CALL FREAD(7, 'I:', DATA2(I))
```

```
      CALL FREAD(8, 'I:', IE(I))

C     OFFSET ADJUSTMENT

      DAT1(I)=DATA1(I)*1.0 + 4080.0
      DAT2(I)=DATA2(I)*1.0 + 4080.0
      EI(I) =(IE(I)*1.0+4080.0)/10.0
   10 CONTINUE

      DO 2 I=1, 1024
      ANS(I)=-(DLOG(DAT2(I)/DAT1(I)))
    2 CONTINUE

C     TO FIND THE PEAK POINT AND 100 POINTS
C     IN THE NEIGHBOURHOOD OF THE PEAK

      BIG=0.0
      DO 11 I=1, 1024
      IF(ANS(I).LE.BIG) GOTO 11
      BIG= ANS(I)
      IP = I
   11 CONTINUE
      IPA= IP-51
      DO 12 I=1, N
      J(I)=IPA+I
      X(I)=J(I)*1.0
      Y(I)= ANS(IPA+I)
   12 CONTINUE



      CALL CORPEK(X, Y, N ,PX, PY)

      IP1X = PX/1
      P1Y = PY
      TAD = ANS(IP1X)


C     TO CALCULATE THE PEAK OF THE
C     ETALON TRACES

C     TO LOCATE THE FIRST PEAK

      BIG = 0.0
      DO 21 I =80, 300
      IF(EI(I).LT.BIG) GOTO 21
      BIG = EI(I)
      IP1 = I
   21 CONTINUE

C     TO LOCATE THE SECOND PEAK
```

```
22    BIG = 0.0
      JP=IP1+200
      DO 23 I =400, 550
      IF(EI(I).LT.BIG) GOTO 23
      BIG = EI(I)
      IP2 = I
23    CONTINUE

C     TO LOCATE THE THIRD PEAK

      BIG = 0.0
      JP=IP1+200
      DO 24 I =650, 800
      IF(EI(I).LT.BIG) GOTO 24
      BIG = EI(I)
      IP3 = I
24    CONTINUE


C     TO FIND THE COORDINATES
C     OF THE FIRST PEAK

      IPA= IP1-51
      DO 25 I=1, N
      J(I)=IPA+I
      X(I)=J(I)*1.0
      Y(I)= EI(IPA+I)
25    CONTINUE

      CALL CORPEK(X, Y, N, PX, PY)
      P2X = PX
      P2Y = PY

C     TO FIND THE COORDINATES
C     OF THE SECOND PEAK

      IPA = IP2-51
      DO 26 I = 1, N
      J(I)=IPA+I
      X(I)=J(I)*1.0
      Y(I)=EI(IPA+I)
26    CONTINUE

      CALL CORPEK(X, Y, N, PX, PY)
      P3X = PX
      P3Y = PY

C     TO FIND THE COORDINATES
C     OF THE THIRD PEAK

      IPA = IP3-51
      DO 27 I = 1, N
      J(I)=IPA+I
      X(I)=J(I)*1.0
```

```
      Y(I)=EI(IPA+I)
   27 CONTINUE

      CALL CORPEK(X, Y, N, PX, PY)
      P4X = PX
      P4Y = PY

      DF1 = P4X-P3X
      DF2 = P3X-P2X

      AVG = (DF1+DF2)/2.0

C     THE ETALON FORMULA

      DX =(3.0E+10/((2.0*1.0*11.7859*
     1 *2.54)*(AVG)))/1.0E+06


      FE(1)=FE0-(DX*(IP1X-1))
      DO 28 I=2, 1024
      FE(I)= (FE(I-1)+DX)
   28 CONTINUE

C     TO CALCULATE THE EXPERIMENTAL
C     VOIGT LINEWIDTH

      PY2= P1Y/ 2.0
      DF1 = 1.0E+10
      DO 30 I= 201, 500
      DIFF = (PY2-ANS(I))
      DF2 = SQRT(DIFF**2)
      IF(DF2.GE.DF1) GOTO 30
      DF1 = DF2
      ID1 = I
   30 CONTINUE
   31 DF3 = 1.0E+10
      IPP=ID1+10
      DO 32 I= IPP, 1024
      DIFF = (ANS(I)-PY2)
      DF4 = ABS(DIFF)
      IF(DF4.GE.DF3) GOTO 32
      DF3 = DF4
      ID2 = I
   32 CONTINUE


      HW = DX*(ID2 - ID1)



      WRITE(12,73)FE0
      WRITE(12,71)DDL
      WRITE(12,72)HW
   71 FORMAT(/,'DOPPLER WIDTH   =',F15.6,1X,'MHz'/)
```

```
 72  FORMAT(/,'EXPT LINE-WIDTH =',F15.6,1X,'MHz'/)
 73  FORMAT(/,'LINE CENTER     =',E15.6,1X,'MHz'/)


     DO 50 I=1, 1024

     ANS(I)=ANS(I)/TAD
     FE(I)=(FE(I)-FE0)/DDW

 50  CONTINUE

C    CALCULATION OF ABSORPTION COEFFICIENT
C    AT LINE CENTER

     XH = FE(ID1)
     X0 = FE(IP1X)
     CK = ANS(ID1)


     XL = X0
     YL = 1.0
     LK = 11

     CALL VOIGT(XL, YL, LK, VT, MET)
     CVT = VT
     LK = 9

C    INITIAL FITTING


     Y1 = 0.0
     Y2 = 10.0
     NN = 0
 85  Y3 = (Y1+Y2)/2.0
     NN = NN +1
     XL = X0
     YL = Y3
     CALL VOIGT(XL, YL, LK, VT, MET)
     CVT= VT
     XL = XH
     CALL VOIGT(XL, YL, LK, VT, MET)
     CD = CK - (VT/CVT)
     CDD = SQRT(CD*CD)
     IF(CD.EQ.0.0) GOTO 88
     IF(CDD.LE.0.0001) GOTO 88
     IF(CD.GT.0.0) GOTO 86
     Y2 = Y3
     GOTO 85
 86  Y1 = Y3
     GOTO 85
 88  YL = Y3
     XL = X0
     CALL VOIGT(XL, YL, LK, VT, MET)
```

```
      CVT = VT


      XL = XH
      CALL VOIGT(XL, YL, LK, VT, MET)
      CD = VT/CVT


      YL = YL - 0.6
      CIN= 0.1

      ISQ = 2

  102 DO 91 M = 1, 10
      YL = YL + CIN
      YA(M) = YL

C     SUM OF SQUARED ERROR
C     FITTING


      SER = 0.0
      SEQR= 0.0

      XL = X0
      CALL VOIGT(XL, YL, LK, VT, MET)
      CVT = VT

      DO 95 I=200, 750
      XL = FE(I)

      CALL VOIGT(XL, YL, LK, VT, MET)
      DVT(M,I)=VT/CVT
      SER = SER + (DVT(M,I)-ANS(I))
      SEQR =SEQR + (DVT(M,I)-ANS(I))**2
   95 CONTINUE


      SR(M) = SER
      SQR(M)= SEQR


   91 CONTINUE


      ISQ = ISQ - 1
      IF(ISQ.LE.0) GOTO 105

      DO 101 I=2, 10
      IF(SQR(I).GT.SQR(I-1)) GOTO 103
  101 CONTINUE
      GOTO 997
  103 CIN = (YA(I)-YA(I-2))/10.0
```

```
      YL = YA(I-2)-CIN
      GOTO 102

  105 DO 106 I=2, 10
      IF(SQR(I).GT.SQR(I-1)) GOTO 106
      YS=YA(I)
      M = I
  106 CONTINUE

      DO 108 I= 1, 1024
      IF(DVT(M,I).GT.0.5) GOTO 110
  108 CONTINUE

C     TO CALCULATE
C     THE FITTED
C     VOIGT LINEWIDTH


  110 DDI = DVT(M,I)-DVT(M,I-1)
      DXI = 0.5 - DVT(M,I-1)
      DDX = FE(I) - FE(I-1)
      THW = FE(I-1)+(DXI*DDX/DDI)
      THW = SQRT((2.0*THW*DDW)**2)
      PBR = YA(M)*DDW


      WRITE(12,44)THW
      WRITE(12,62)PBR
      WRITE(12,63)PRS
   44 FORMAT(/,'THEO LINE-WIDTH =',F15.6,1X,'MHz',/)
   62 FORMAT(/,'PRES BROD WIDTH =',F15.6,1X,'MHz',/)
   63 FORMAT('                   ',F8.3,1X,'TORR';/)

  997 STOP
      END


C     ****** SUBROUTINE * 1 **

C     LEAST SQUARES PARABOLA
C     FIT TO COMPUTE THE
C     COORDINATES OF THE PEAK

      SUBROUTINE CORPEK(X, Y, N, PX, PY)
      DOUBLE PRECISION X(N), Y(N)
      AK1 = 0.0
      AK2 = 0.0
      AK3 = 0.0

      X4 = 0.0
      X3 = 0.0
      X2 = 0.0
      X1 = 0.0
```

```
      A(7) = 0.0362157301623914
      A(8) =-0.0208497654398036
      A(9) = 0.0111960116346270
      A(10)=-0.0056231896167109
      A(11)= 0.0026487634172265
      A(12)=-0.0011732670757704
      A(13)= 0.0004899519978088
      A(14)=-0.0001933630801528
      A(15)= 0.0000722877446788
      A(16)=-0.0000256555124979
      A(17)= 0.0000086620736841
      A(18)=-0.0000027876379719
      A(19)= 0.0000008566873627
      A(20)=-0.0000002518433784
      A(21)= 0.0000000709360221
      A(22)=-0.0000000191732257
      A(23)= 0.0000000049801256
      A(24)=-0.0000000012447734
      A(25)= 0.0000000002997777
      A(26)=-0.0000000000696450
      A(27)= 0.0000000000156262
      A(28)=-0.0000000000033897
      A(29)= 0.0000000000007116
      A(30)=-0.0000000000001447
      A(31)= 0.0000000000000285
      A(32)=-0.0000000000000055
      A(33)= 0.0000000000000010
      A(34)=-0.0000000000000002


C     HERMITE CONSTANTS

      GA(1)= 0.5246476
      GA(2)= 1.6506801
      GA(3)= 0.7071068

      GB(1)= 0.2562121
      GB(2)= 0.02588268
      GB(3)= 0.2820948


C     DAWSONS FUNCTION FOR
C     25  POINTS FOR
C     X = 1 TO 5

      DO 900 I=1, 15
      DI(I)= -I/2.0
  900 CONTINUE

      DO 500 I=1, 25
      EX(I) = 0.201*(I-0.5)
      EXX(I)= EX(I)/5.0
```

```
      DO 13 I=1,100
      AK1 = AK1+(Y(I)*(X(I)**2))
      AK2 = AK2+(Y(I)*X(I))
      AK3 = AK3+Y(I)
      X4  = X4+(X(I)**4)
      X3  = X3+(X(I)**3)
      X2  = X2+(X(I)**2)
      X1  = X1+X(I)
   13 CONTINUE


      E  = (N*AK1)-(AK3*X2)
      F  = (N*AK2)-(AK3*X1)
      XX1= (N*X4) -(X2*X2)
      XX2= (N*X3) -(X1*X2)
      XX3=  XX2
      XX4= (N*X2) -(X1*X1)

      A = (E*XX4 - F*XX2)/(XX1*XX4 - XX3*XX2)
      B = (F- A*XX3)/XX4
      C = (AK3-(A*X2)-(B*X1))/N

      PX = -B/(2*A)
      PY = A*(PX**2)+(B*PX)+C
      RETURN
      END


C     ****** SUBROUTINE * 2 **

C     TO CALCULATE THE ABSORPTION
C     COEFF FOR A VOIGT PROFILE

      SUBROUTINE VOIGT(XL, YL, LK, VT, MET)

      DOUBLE PRECISION A(50), D0(25), D1(25),
     1 D3(25), D4(25), EX(25), GA(3), GB(3),
     1 T(80), COF(25), DI(25), EXX(25), D2(25)


      X = SQRT(XL*XL)
      Y = YL
      IF(LK.LE.10) GOTO 99


C     CHEBYSHEV CONSTANTS

      A(1) = 0.1999999999972224
      A(2) =-0.1840000000029998
      A(3) = 0.1558399999965024
      A(4) =-0.1216640000043988
      A(5) = 0.0877081599940391
      A(6) =-0.0585141248086907
```

```
C     COMPUTATION USING CHEBYCHEV POLYNOMIALS

      T(1)=1.0
      T(2)=EXX(I)

      DO 201 J=3, 70
      T(J)=(2.0*EXX(I)*T(J-1))-T(J-2)
  201 CONTINUE


      FX = A(1)*T(2)

      DO 251 J=1, 33
      FX = FX+(A(J+1)*T(2*J+2))
  251 CONTINUE


      D0(I)=FX
      D1(I)=1.0 - 2.0*EX(I)*D0(I)
      D2(I)=(EX(I)*D1(I)+D0(I))/DI(2)
      D3(I)=(EX(I)*D2(I)+D1(I))/DI(3)
      D4(I)=(EX(I)*D2(I)+D2(I))/DI(4)

  500 CONTINUE


      DO 551 I=1, 19
      COF(I)= (20-I)/2
  551 CONTINUE


   99 X = SQRT(XL*XL)
      Y = YL

      IF(X-5.0) 100, 200, 200
  100 IF(Y-1.0) 150, 150, 110
  110 C1 = 1.85*(3.6-Y)
      IF(X.GT.C1) GOTO 200

C     CONTINUED FRACTION METHOD

      X = SQRT(XL*XL)
      Y = YL
      MET = 2
      GG = Y
      RR = X



      DO 120 I=1, 19
      R = COF(I)/(RR**2 + GG**2)
      GG = Y + R*GG
      RR = X - R*RR
```

```
  120  CONTINUE
       VT =(GG/(RR**2 + GG**2))/1.772454

       RETURN


  150  C3=X+Y
       IF(C3.GE.5.0) GOTO 300


       MET = 1


       N = X/0.207
       DX = X - EX(N+1)
       R =(((D4(N+1)*DX+D3(N+1))*DX+D2(N+1))*DX+
      1D1(N+1))*DX+D0(N+1)

       G = 1.0 - 2.0*X*R
       RR = (EXP(Y*Y-X*X)*COS(2.0*X*Y)/1.128379)
      1 - Y*G
       GG = -Y

       DO 155 I=2, 6, 2
       R = (X*G+R)/DI(I)
       G = (X*R+G)/DI(I+1)
       GG= -GG*Y*Y
       RR= RR+G*GG
  155  CONTINUE

       VT = 1.128379*RR
       RETURN


C      TWO-POINT METHOD


  200  X = SQRT(XL*XL)
       Y = YL
       C2 = 11.0 - (0.6875*X)
       IF(Y.LT.C2) GOTO 300

       GG= X - GA(3)
       RR= X + GA(3)

       VT = Y*((GB(3)/(Y**2+GG**2))
      1 +(GB(3)/(Y**2+RR**2)))
       MET = 3
       RETURN

C      FOUR POINT METHOD
```

```
300 X = SQRT(XL*XL)
    Y = YL

    G = X - GA(1)
    R = X + GA(1)
    GG= X - GA(2)
    RR= X + GA(2)

    AKA = GB(1)/(Y**2+G**2)
    AKB = GB(1)/(Y**2+R**2)
    AKC = GB(2)/(Y**2+GG**2)
    AKD = GB(2)/(Y**2+RR**2)


    VT = Y*(AKA+ AKB+ AKC+ AKD)
    MET = 4


    RETURN
    END
```

ASSEMBLEY LANGUAGE PROGRAM LISTING FOR
DATA ACQUISITION INTERFACE

```
TLR     EQU $7000   8291 address in the memory space
CLR     EQU $7800   8292 address in the memory space

*****************************************************
*              Registers in 8291                    *
*****************************************************

DINR    EQU TLR     data in reg
DOUT    EQU TLR     data out reg
INST1   EQU TLR+$1  int status1     read only
INTEN   EQU TLR+$1  int enable      write only
INST2   EQU TLR+$2  int status 2    read only
INTEN2  EQU TLR+$2  int enable 2    write only

SPLST   EQU TLR+$3  serial poll status   r
SPMD    EQU TLR+$3  serial poll mode     w
ADDST   EQU TLR+$4  address status       r
ADDMD   EQU TLR+$4  address mode         w
CMNDPT  EQU TLR+$5  command pass thro    r
AUXMD   EQU TLR+$5  aux mode             w

ADD0    EQU TLR+$6  add 0                r
ADD01   EQU TLR+$6  address 0/1          w

ADD1    EQU TLR+$7  address1
EOS     EQU TLR+$7  end of sequence character   w

*****************************************************
*              8292 REGISTERS                       *
*           These registers belong to               *
*                Controller                         *
*****************************************************


CINST   EQU CLR+$1  interrupt status   read only
CMDFG   EQU CLR+$1  command flag register
CINMSK  EQU CLR     int mask   this reg is for write only
*                   but issuing  RINM  will transfer
*                   its contents to RDBUS


ERRMSK  EQU CLR     error mask  this reg is for write only
*                   but  RERM  will transfer its contents
*                   to RDBUS


RDBUS   EQU CLR
WRBUS   EQU CLR

*****************************************************
*           COMMAND ALLOCATION FOR 8291             *
```

```
*****************************************************

*           FOR ADDRESS MODE REGISTER

TONLY   EQU $80
LONLY   EQU $40

*           FOR AUX MODE REGISTER

IXPON   EQU $00     imm ex pon
CRST    EQU $02     chip reset
FHS     EQU $03     finish hand-shake
SEOI    EQU $06     send EOI with next byte
PON     EQU $08     power on
CLOCK   EQU $22     sets 8291 clock as 2Mhz
AUXA    EQU $83     this has to be written in aux-A register
*                   via aux mode register
*
AUXB    EQU $A8     similar to aux-A, but for aux-B
AUXP    EQU $70     similar to aux-A,B, but for aux-P

*****************************************************
*           OPERATION AND UTILITY COMMANDS FOR THE  *
*                     CONTROLLER                    *
*****************************************************

*           OPERATION COMMANDS

SPCNI   EQU $F0     stop counter int                TCI
GIDL    EQU $F1     go to idle                      TCI
RST     EQU $F2     reset                           TCI
RSTI    EQU $F3     reset int                       TCI
GSEC    EQU $F4     goto stand by, but enable count TCI
EXPP    EQU $F5     ex parallel poll                TCI
GTSB    EQU $F6     go to stand by                  TCI
SLOC    EQU $F7     set loc mode                    TCI
SREM    EQU $F8     set rem control                 TCI
ABORT   EQU $F9

TCNTR   EQU $FA     take control                    TCI
TCASY   EQU $FC     take control asynchronously     TCI
TCSY    EQU $FD     take control synchronously      TCI
STCNI   EQU $FE     start counter int               TCI

*           UTILITY COMMANDS

WTOUT   EQU $E1     wr time out reg
WEVC    EQU $E2     wr event counter
REVC    EQU $E3     rd evc reg
RERF    EQU $E4     rd err flag
RINM    EQU $E5     rd int mask
```

```
RCST    EQU $E6     rd controller status
RBST    EQU $E7     rd bus status
RTOUT   EQU $E9     rd time out reg
RERM    EQU $EA     rd err mask reg
IACK    EQU $FF     int ack

MTA     EQU $5E     my talk address/ for signal averager
MLA     EQU $3E     my listen address/ sig ave'r
UNL     EQU $3F     unlisten

BIM     EQU $01     byte input mask
BOM     EQU $02     byte outpt mask

TLOC    EQU $6800   test location write to display LED
RAM     EQU $0800   begining of RAM
STACK   EQU $0B8F   stack pointer

*********************************************************
*           ACIA REGISTERS                              *
*********************************************************

CONRG   EQU $01     control register     w  OUT
STARG   EQU $01     status  register     r  IN
TXRG    EQU $03     transmitt  reg       w  OUT
RECRG   EQU $03     receive reg          r  IN

*********************************************************
*           INITIALIZE ACIA                             *
*********************************************************

        ORG $0000
OGN     NOP
        NOP
        LXI SP,STACK            stack pointer

        MVI A,$03
        OUT CONRG               7 bit, even parity
        MVI A,$01               2 stop bits
        OUT CONRG
        IN RECRG

        CALL SYS                display system on
        CALL ACI                display acia initialized
```

```
        MVI A,$51
        STA TLOC

*********************************************************
*           INITIALIZING 8291,8292                      *
*********************************************************

INTI    MVI A,RST
        STA CMDFG               reset 8292



        MVI A,ABORT
        STA CMDFG               abort ieee-bus activity

        MVI A,$A0
        STA CINMSK              enable TCI int

        MVI A,$AC
        STA TLOC
        MVI A,CRST
        STA AUXMD               reset 8291


        MVI A,TONLY
        STA ADDMD               set 8291 to talk only

        MVI A,CLOCK
        STA AUXMD               set 8291 clock to 2Mhz

        MVI A,AUXA
        STA AUXMD               set contineous hand shake
        MVI A,AUXB
        STA AUXMD
        MVI A,AUXP
        STA AUXMD               ignore parallel poll


        MVI A,$FF
        STA TLOC
        MVI A,IXPON
        STA AUXMD

*********************************************************
*       now the 8291 should be initialized              *
*       and should be ready for data transmission       *
*********************************************************

        CALL IEI                display ieee488 initialized

        MVI A,$AD
        STA TLOC
```

```
        MVI A,MLA           address of the averager
        STA DOUT
        CALL CBOUT          call subroutine to check
*                           byte o/p
*
*
        MVI A,$EF
        STA TLOC
        MVI A,SREM          set remote enable
        STA CMDFG
        CALL TCI            call task complete int
        CALL DELA
*********************************************************
*          set controller standby                       *
*********************************************************

        MVI A,$BB
        STA TLOC
        MVI A,GTSB          go to stby
        STA CMDFG
        CALL TCI


        MVI A,$52
        STA TLOC
        CALL DELA

        CALL CSBY

*********************************************************
*          clear the memory of the                      *
*                averager                               *
*********************************************************

        MVI A,'C'
        STA DOUT
        OUT TXRG
        CALL OUT
        CALL CBOUT
        MVI A,'M'
        STA DOUT
        OUT TXRG
        CALL OUT
        CALL CBOUT
        MVI A,$0D
        STA DOUT
        OUT TXRG
        CALL OUT
        CALL CBOUT
        MVI A,$0A
        STA DOUT
        OUT TXRG
        CALL OUT
        CALL CBOUT
```

```
        CALL DELA

        CALL CMST

        MVI A,$53
        STA TLOC
        CALL DELA           press switch to continue


        MVI A,FHS
        STA AUXMD
        MVI A,TCSY
        STA CMDFG
        CALL TCI            take control

        CALL TCTR

        MVI A,UNL
        STA DOUT
        CALL CBOUT

        MVI A,MTA
        STA DOUT
        CALL CBOUT          set avg'r to talk

        CALL AGTK

CON3    MVI A,PON
        STA AUXMD
        MVI A,LONLY
        STA ADDMD
        MVI A,$80
        STA AUXMD
        MVI A,IXPON
        STA AUXMD           set 8291 to listen only
        CALL DELA

        MVI A,$C3
        STA TLOC

        MVI A,GTSB
        STA CMDFG
        CALL TCI            set controller stby

        CALL CSBY

        CALL DELA
```

```
        LXI B,4
DIN     LDA INST1           look for din full
        ANI BIM
        JZ DIN
        LDA DINR
        OUT TXRG            output to ACIA
        CALL OUT
        CALL DELA
        DCX B
        MOV A,C
        ANI $FF
        JNZ DIN


        MVI A,TCASY
        STA CMDFG
        CALL TCI


        CALL TCTR

        MVI A,TONLY
        STA ADDMD
        MVI A,AUXA
        STA AUXMD
        MVI A,IXPON
        STA AUXMD


        MVI A,MLA
        STA DOUT
        CALL CBOUT

        CALL AGLN

        MVI A,FHS
        STA AUXMD

        MVI A,GTSB
        STA CMDFG
        CALL TCI

        CALL DELA

*****************************************************
*           start sweep                             *
*****************************************************

        MVI A,'G'
        STA DOUT
        OUT TXRG
        CALL OUT
```

```
        CALL CBOUT
        MVI A,'O'
        STA DOUT
        OUT TXRG
        CALL OUT
        CALL CBOUT
        MVI A,$0D
        STA DOUT
        OUT TXRG
        CALL OUT
        CALL CBOUT
        MVI A,$0A
        STA DOUT
        OUT TXRG
        CALL OUT
        CALL CBOUT


        CALL CLF


        MVI A,FHS
        STA AUXMD

        MVI A,TCASY
        STA CMDFG
        CALL DELAY


        .
        MVI A,UNL
        STA DOUT
        CALL CBOUT
        MVI A,MTA
        STA DOUT
        CALL CBOUT
        MVI A,LONLY
        STA ADDMD
        MVI A,$80
        STA AUXMD
        MVI A,IXPON
        STA AUXMD

        MVI A,$54
        STA RAM

        MVI A,GTSB
        STA CMDFG
        CALL TCI

        CALL DELA

        LXI B,5
DATA    LDA DINR
```

```
        OUT TXRG
        CALL OUT
DD      LDA INST1
        ANI BIM
        JZ DD
        DCX B
        MOV A,C
        ANI $FF
        JNZ DATA

        CALL CLF
        MVI A,'%'
        OUT TXRG
        CALL OUT



        MVI A,FHS
        STA AUXMD
        MVI A,TCSY
        STA CMDFG
        CALL TCI

        CALL FLASH

        LXI H,RAM+20
        LXI B,300
INPT    CALL INP
        IN RECRG
        MOV M,A
        INX H
        DCX B
        MOV A,B
        ANI $FF
        JNZ INPT
        MOV A,C
        ANI $FF
        JNZ INPT


ZZZ     LXI SP,STACK
        CALL FLASH


        LXI H,RAM+20
        CALL CLF


*********************************************************
*           transfer temperature and                    *
*             pressure data from                        *
*                data logger                            *
*********************************************************
```

```
ALFA    MOV A,M
        SUI '+'          look for + in the data stream
        JNZ BETA

KAPA    INX H
        MOV A,M
        SUI 'C'          look for C in the data
        JZ GMA

        MOV A,M
        SUI 'V'          look for V in the data
        JZ DLTA

        MOV A,M          transmit the valid data
        OUT TXRG
        CALL OUT
        JMP KAPA

GMA     CALL CLF
BETA    INX H
        JMP ALFA

DLTA    CALL CLF


        MVI A,TONLY
        STA ADDMD
        MVI A,AUXA
        STA AUXMD
        MVI A,IXPON
        STA AUXMD


        MVI A,UNL
        STA DOUT
        CALL CBOUT
        MVI A,MLA
        STA DOUT
        CALL CBOUT

        MVI A,GTSB
        STA CMDFG
        CALL TCI

        CALL DELA

        CALL DUMP

        MVI A,$FF
        STA TLOC
        MVI A,FHS
        STA AUXMD
```

```
        MVI A,TCSY
        STA CMDFG
        CALL TCI
        CALL DELA


        MVI A,UNL
        STA DOUT
        CALL CBOUT

        MVI A,MTA
        STA DOUT
        CALL CBOUT

        MVI A,LONLY
        STA ADDMD
        MVI A,$80              cor aux a register
        STA AUXMD
        MVI A,IXPON
        STA AUXMD
        CALL DELA
        MVI A,GTSB
        STA CMDFG
        CALL TCI
        CALL DELA

*****************************************************
*           dump memory data                        *
*****************************************************

        LXI B,1025             dumping 1024 locations
DIN1    CALL OUT
DI      LDA INST1
        ANI BIM
        JZ DI
        LDA DINR
        STA RAM+5


        ANI $F0
        JZ COUNT
        LDA RAM+5
        OUT TXRG

        CALL DELA
        JMP DIN1

COUNT   LDA RAM+5
        OUT TXRG
        CALL OUT
        CALL DELA
CTT     LDA INST1
```

```
        ANI BIM
        JZ CTT
        LDA DINR
        OUT TXRG
        ANI $F0
        JNZ DERR
        DCX B
        MOV A,C
        ANI $FF
        JNZ DIN1
        MOV A,B
        ANI $FF
        JNZ DIN1

*************************************************
*           end of transmission character       *
*************************************************

        CALL CLF
        CALL CLF
        MVI A,'9'
        OUT TXRG
        CALL OUT
        MVI A,'9'
        OUT TXRG
        CALL OUT
        MVI A,'9'
        OUT TXRG
        CALL OUT
        CALL CLF


        MVI A,FHS
        STA AUXMD
        MVI A,TCSY
        STA CMDFG
        CALL TCI
        CALL FLASH
        MVI A,AUXA
        STA AUXMD
        MVI A,TONLY
        STA ADDMD
        MVI A,IXPON
        STA AUXMD
        CALL DELA
        MVI A,MLA
        STA DOUT
        CALL CBOUT
        MVI A,GTSB
        STA CMDFG
        CALL TCI
        CALL DELA
        MVI A,FHS
```

```
        STA AUXMD
        MVI A,TCSY
        STA CMDFG
        CALL TCI
        CALL FLASH
        JMP OGN
        HLT

*****************************************************
*           SUBROUTINES                             *
*****************************************************

*           for data out check

CBOUT   LDA INST1           load accm with int status-1
        ANI BOM             and immd with byte out mask
        JZ  CBOUT
        RET

*           for data in check

CBIN    MVI C,$8
CB      DCR C
        MOV A,C
        ANI $FF
        JZ ERR1
        LDA INST1
        ANI BIM
        JZ CB
        RET

*           for flashing the data in "RAM"

FLASH   LXI D,$FFFF
        LDA RAM
        STA TLOC
CTR     DCX D
        MOV A,D
        ANI $FF
        JNZ CTR
        LXI D,$8FFF
        MVI A,$11
        STA TLOC
CTR1    DCX D
        LDA TLOC
        ANI $FF
```

```
        BIT 0,A
        JNZ CONT            jmp to cont if A0 is 1
        RET
CONT    MOV A,D
        ANI $FF
        JNZ CTR1
        JMP FLASH

*****************************************************
*          commanding  the averager to              *
*          to dump the memory contents              *
*****************************************************

DUMP    LXI H,DMP
        LXI B,16
ST      MOV A,M
        STA DOUT
        OUT TXRG
        CALL OUT
        CALL CBOUT
        CALL DELA
        INX H
        DCX B
        MOV A,C
        ANI $FF
        JNZ ST
        MOV A,B
        ANI $FF
        JNZ ST
        RET
DMP     FCC 'DP,0000,2046,A'
        FDB $0D0A

*           to check task complete

TCI     LDA TLOC
        ANI $FF
        BIT 7,A
        JZ TCI
        RET

*           to check data out in ACIA

OUT     IN STARG
        ANI $02
        JZ OUT
        RET

*           to check data in

INP     IN STARG
        ANI $01
```

```
        JZ INP
        RET

*****************************************************
*            MESSAGES                               *
*****************************************************

SYS     LXI H,MSG1
MG1     MOV A,M
        STA RAM+5
        CALL STOUT
        LDA RAM+5
        ANI $FF
        JNZ MG1
        RET
MSG1    FDB $0D0A
        FCC 'Z80- DATA ACQUISITION INTERFACE'
        FDB $0D0A
        FCC 'SYSTEM ON'
        FDB $0D0A
        FCC '>'
        FCB $00

*

ERR1    LXI H,MSG2
MG2     MOV A,M
        STA RAM+5
        CALL STOUT
        LDA RAM+5
        ANI $FF
        JNZ MG2
        HLT
MSG2    FCC 'INPUT BYTE NOT AVILABLE'
        FDB $0D0A
        FCC '>'
        FCB $00

*

ACI     LXI H,MSG3
MG3     MOV A,M
        STA RAM+5
        CALL STOUT
        LDA RAM+5
        ANI $FF
        JNZ MG3
        RET
MSG3    FCC 'RS232 SET'
        FDB $0D0A
        FCC '>'
        FCB $00
```

```
*
IEI     LXI H,MSG4
MG4     MOV A,M
        STA RAM+5
        CALL STOUT
        LDA RAM+5
        ANI $FF
        JNZ MG4
        RET
MSG4    FCC 'IEEE SET'
        FDB $0D0A
        FCC '>'
        FCB $00
*
DELAY   LXI H,$FF00
D1      DCX H
        MOV A,H
        ANI $FF
        JNZ D1
        MOV A,L
        ANI $FF
        JNZ D1
        RET
*
DELA    LXI D,50
D2      DCX D
        MOV A,E
        ANI $FF
        JNZ D2
        MOV A,D
        ANI $FF
        JNZ D2
        RET
*
DEM     FCC 'IMPROPER FORMAT FROM AVERAGER'
        FDB $0D0A
        FCB $00
DERR    LXI H,DEM
DEM1    MOV A,M
        STA RAM+5
        CALL STOUT
        LDA RAM+5
        ANI $FF
        JNZ DEM1
        HLT
*
CSMG    FDB $0D0A
```

```
        FCC 'CSBY'
        FDB $0D0A
        FCB $00
CSBY    LXI H,CSMG
CSB1    MOV A,M
        STA RAM+5
        CALL STOUT
        LDA RAM+5
        ANI $FF
        JNZ CSB1
        RET

*

CMSG    FDB $0D0A
        FCC 'CLEAR MEMORY'
        FDB $0D0A
        FCB $00
CMST    LXI H,CMSG
CMST1   MOV A,M
        STA RAM+5
        CALL STOUT
        LDA RAM+5
        ANI $FF
        JNZ CMST1
        RET

*

TCTG    FDB $0D0A
        FCC 'CONR ACTV'
        FDB $0D0A
        FCB $00
TCTR    LXI H,TCTG
TCT1    MOV A,M
        STA RAM+5
        CALL STOUT
        LDA RAM+5
        ANI $FF
        JNZ TCT1
        RET

*

AGT     FDB $0D0A
        FCC 'AVG TK'
        FDB $0D0A
        FCB $00
AGTK    LXI H,AGT
AG1     MOV A,M
        STA RAM+5
        CALL STOUT
        LDA RAM+5
        ANI $FF
```

```
        JNZ AG1
        RET

*

AGL     FDB $0D0A
        FCC 'AVG LN'
        FDB $0D0A
        FCB $00
AGLN    LXI H,AGL
AGL1    MOV A,M
        STA RAM+5
        CALL STOUT
        LDA RAM+5
        ANI $FF
        JNZ AGL1
        RET

*

LOOP    LXI D,$FFFF
        INX H
        DCX B
        MOV A,C
        ANI $FF
        JZ L1
        RET
L1      MOV A,B
        ANI $FF
        JZ L2
        RET
L2      LXI D,$0000
        RET

*

STOUT   INX H
        LDA RAM+5
        ANI $FF
        JZ STUT
        LDA RAM+5
        OUT TXRG
        CALL OUT
STUT    RET

*

CLF     MVI A,$0D           to transmit cr lf
        OUT TXRG
        CALL OUT
        MVI A,$0A
        OUT TXRG
        CALL OUT
        RET
```